

Life Is On

Schneider
Electric

AUTHORISED DEALERS OF "TARGET" & "AGRONIC" PRODUCTS :

M/S. TEJEET ELECTRICAL & ENGG. CORP.

4, MAHAVIR PRAKASH, V. B. LANE, GHATKOPAR(E), MUMBAI-400077

MOBILE : 09820817655 ,E-mail : tejeet1@gmail.com ; tejeet@yahoo.com

Website: www.ec51.com/tejeet/ ; www.indiamart.com/tejeet-electrical-engg/

LP + 28% GST DISCOUNT : ON REQUEST

DOWNLOAD ALL LATEST PRICELIST FROM THIS LINK:


<https://drive.google.com/folderview?id=0B0m1HPtwvxUpN1EyQmw2Zy1Od28>



 Price List

Final Distribution, Wiring Devices and Lighting Control Products

With effect from July 01, 2017*

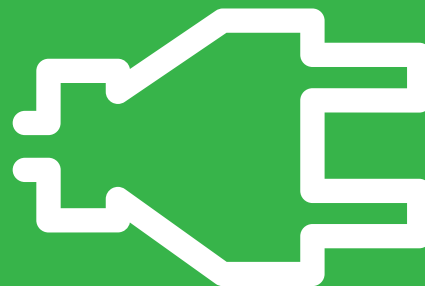

* Final Distribution, Wiring Devices prices w.e.f June 01, 2017

Price List

Contents

Acti 9 Distribution System

> ComReady Control and Command Products	6
> Miniature Circuit Breakers (MCBs)	10
> Residual Current Devices (RCDs)	13
> Auxiliaries and Accessories for MCBs/RCDs	16
> Surge Protection Devices (SPDs)	18
> Control and Command Products	20
> Modular Distribution Boards - Metallic	22

Enclosures and Plugs & Sockets

> NeoBreak Distribution Boards	29
> Kaedra Enclosures - Weather Proof	31
> PratiKa Plugs & Sockets - IP44 / IP67	33
> Electra Metal Clad Plugs & Sockets	37
> 56 Series Plugs & Sockets - IP56 / IP66	38

Wiring Devices

> LIVIA	42
> Opale	43
> ZENcelo India	45
> ZENcelo BS	47
> NEO	49
> ULTI Impress	51
> Kavacha	53
> Metal Boxes	54

Control System

> EzInstall3 - ULTIZIGBEE	55
> WISER Home	56
> Sympholux - KNX,C-Bus, DALI	57
> Hotel Series	58
> Argus	60
> Ceiling and Wall Mount Sensors	60
> Control and Command Products	61
> Analog Timers	62
> Xighto Pro - Video Door Entry System	63

Structured Cabeling Solutions

> Datacomms	64
-----------------------	----

Acti 9 | Advanced Communication Technology that Inspires.....

>Innovative

- Centralized control system including energy metering
- Large and variable data reading and computing through universal Modbus protocol

>Efficient


- One-click, prefabricated wiring for comprehensive communication between your distribution board or panel and any facility management system

>Reliable

- Error proof connection leading to reduction in downtime
- EMC tested for immunity, radiated and conducted safety


NEW

Email Notification upon Event (Device Status Change, Alarm threshold reached etc.)

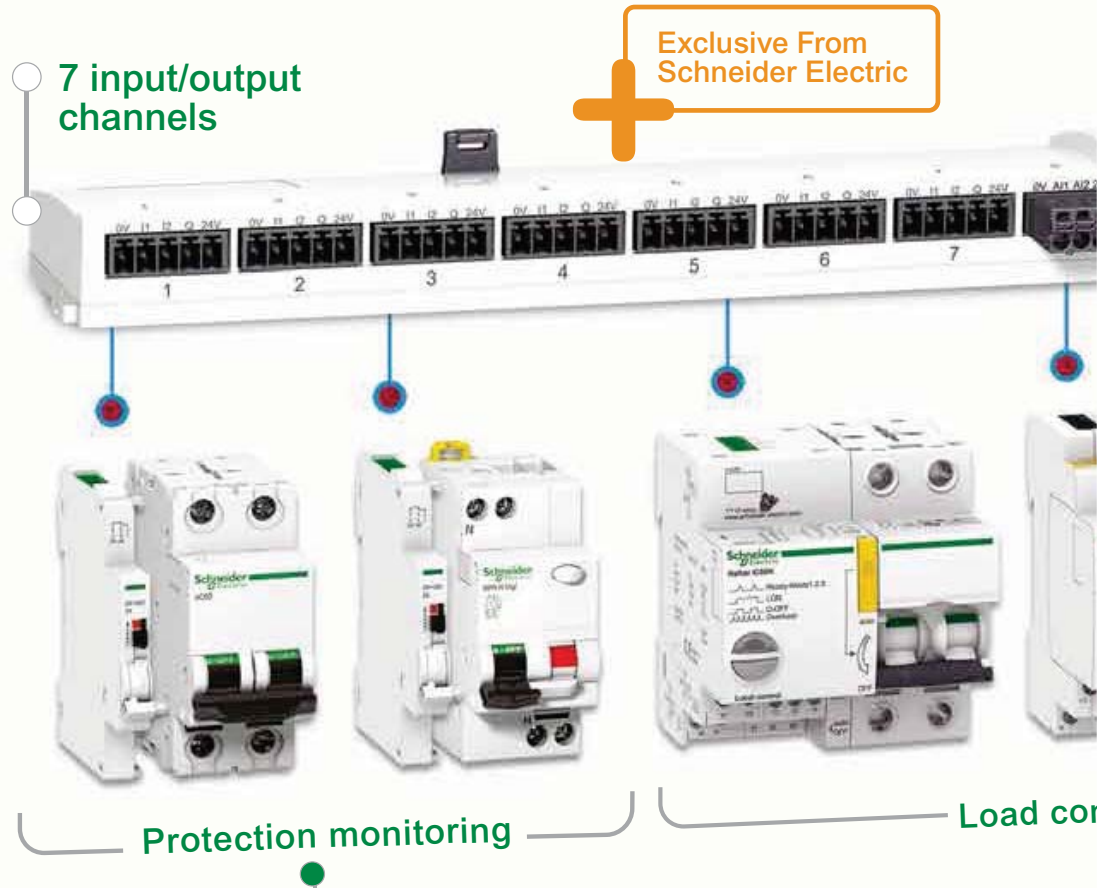


> Status Monitoring - ON / OFF / TRIP
 > Trip Alarm Indication
 > Load Monitoring - No. of tripping cycles, Running Hours

> Switching Action - ON / OFF
 > Monitoring - No. of Switching running hours

 **Meets the challenge of all your applications**
 Detailed load control, reduced downtime and accurately planned maintenance

Ready to connect to any facility management solution

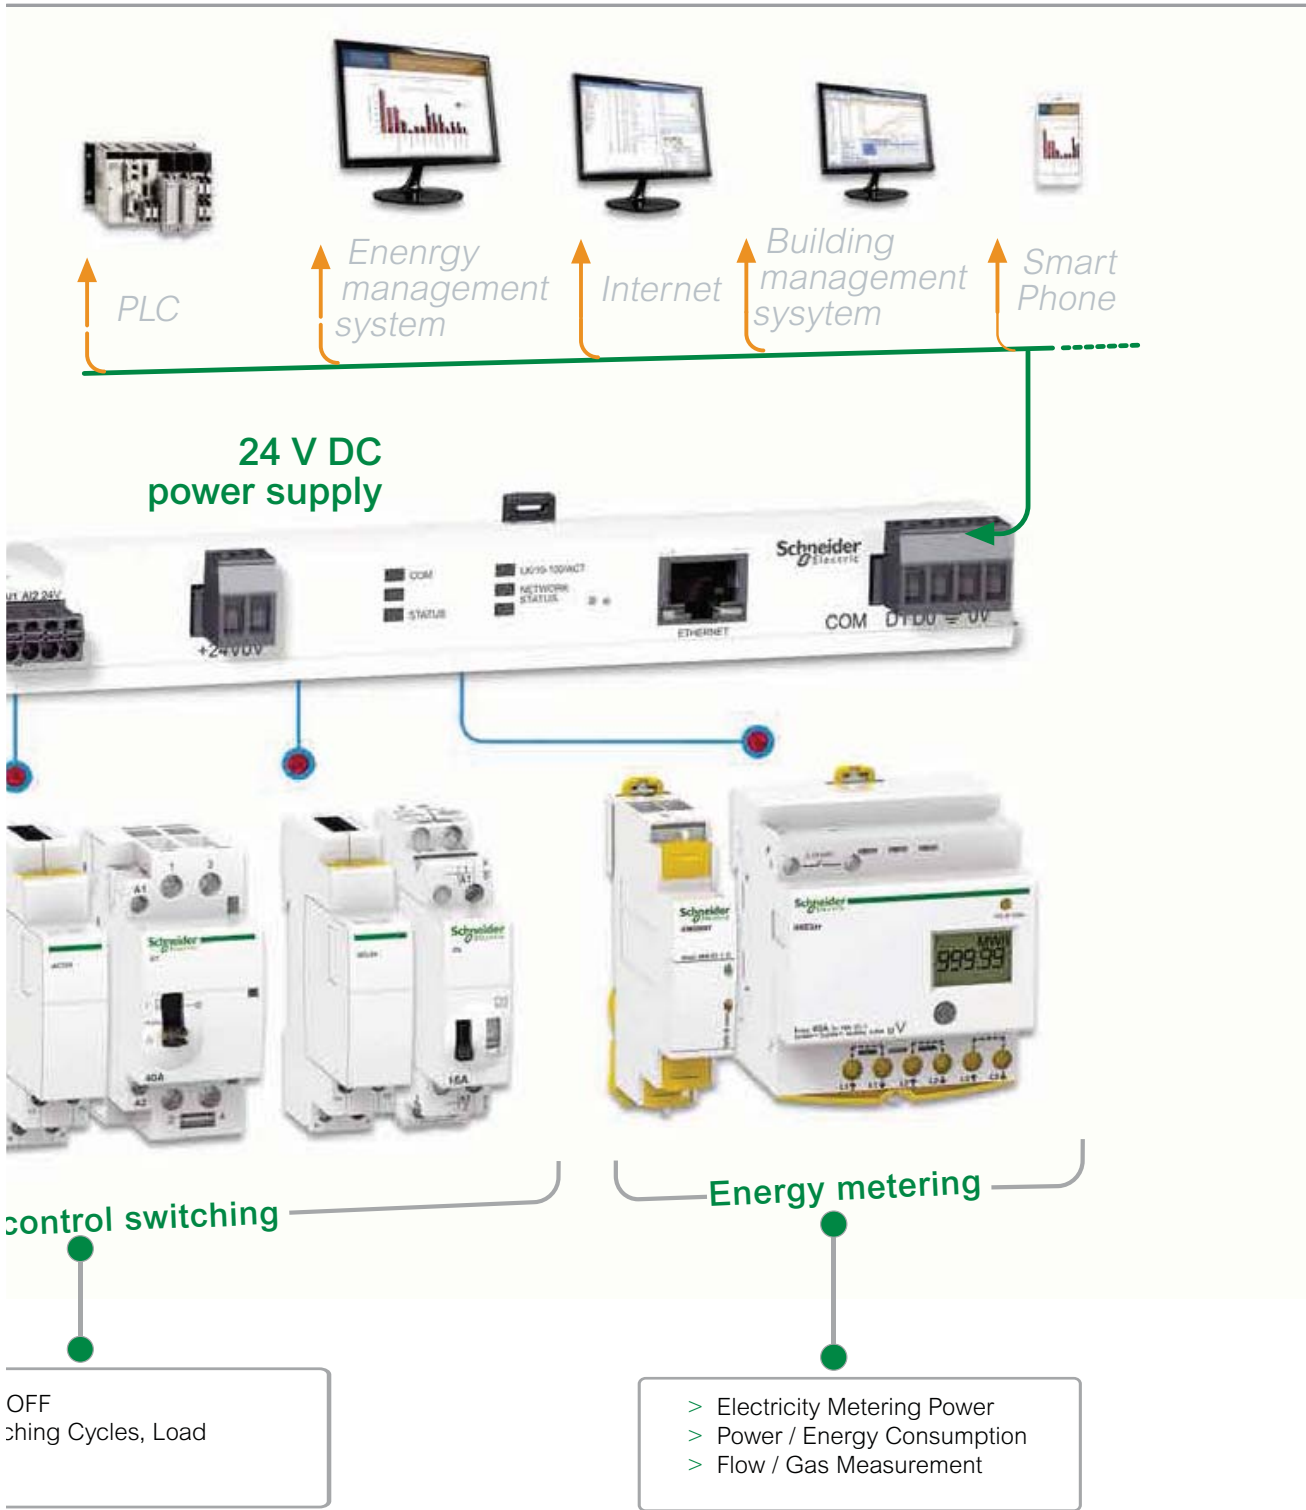

Green Premium Products

100% Recyclable and Recoverable
REACH, ROHS, PEP, EOL compliant

Acti 9

Advanced Communication
Technology that Inspires...

ComReady Control and Command Products

Smartlink



- Compliance to IEC/EN 61131-2
- Protection Monitoring – Device Status and alarm notifications
- Load Control / Switching through Contactors and Impulse Relays
- Energy Monitoring through pulse meters
- Alarm over email and analog sensors (temperature / humidity) with Smartlink Ethernet
- Plug & Play – Pre fabricated cables and in built web pages
- Rated Voltage: 24V DC

Description	Reference	Unit LP [₹]
Smartlink Modbus	A9XMSB11	33170
Smartlink IP	A9XMEA08	36955

Communication Auxiliaries



Auxiliary for Protection Devices (OF+SD24)




Auxiliary for Contactors (iACT24)



Auxiliary for Impulse Relays (iATL24)

Description	Module Width	Reference	Unit LP [₹]
OF+SD24	0.5	A9N26899	2275
iACT24	1	A9C15924	11335
iATL24	1	A9C15424	11935

Accessories



Description	Set of	Reference	Unit LP [₹]
Prefabricated Cables:			
With 2 Connectors			
Short: 100mm	6	A9XCAS06	4610
Medium: 160mm	6	A9XCAM06	4655
Long: 870mm	6	A9XCAL06	5295
With 1 Connector			
Long:870mm	6	A9XCAU06	3180
Connectors			
5-pin connectors (Ti24)	12	A9XC2412	6415
Mounting Kit			
Din Rail (4 feet, 4 Straps, 4 Adapters)	1	A9XMFA04	1255
Multiclip			
Multiclip 80A	1	04000	7715
Spare Parts			
Lock for Multiclip 80A (2 clips)	1	A9XMLA02	382
Distribloc 63A			
Distribution from the top (4 Module)	1	04040	8785
Distribution through the bottom (4 Module)	1	04041	8785
Power Logic EGX300 - Ethernet port (4 Module)	1	30002885	27796
ABL Power Supply - 1.2A 24VDC	1	ABL8MEM24012	5952
ABL Power Supply - 0.6A 24VDC	1	ABL8MEM24006	4368
Double DIN rail	1	LSL58801A	725

LP: List Price

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

Acti 9

Advanced Communication
Technology that Inspires...

ComReady Control and Command Products

Reflex iC60 - Integrated Control & Overcurrent Protection Device



- All in One Solution: MCB + Contactor + Impulse Relay + Auxiliary
- 10kA Breaking capacity as per IEC/EN 60947-2,
- Ti24 interface: Connection to PLC, Smartlink
- 3 operating modes to cater to a variety of applications
- Safe lock down with Integrated Padlocking
- Simplified maintenance: Front face Indicator allows better reliability

[In] Rated Current (A)	2 Pole Reference	Unit LP [₹]	3 Pole Reference	Unit LP [₹]	4 Pole Reference	Unit LP [₹]
Module Width **	4.5 mod		5.5 mod		6.5 mod	
B Curve						
10	A9C61210	31180	A9C61310	33555	A9C61410	34910
16	A9C61216	31200	A9C61316	33585	A9C61416	34955
25	A9C61225	31235	A9C61325	33650	A9C61425	35025
40	A9C61240	33195	A9C61340	36570	A9C61440	38930
63	A9C61263	34345	A9C61363	37285	A9C61463	39175
C Curve						
10	A9C62210	31185	A9C62310	33560	A9C62410	34925
16	A9C62216	31200	A9C62316	33585	A9C62416	34955
25	A9C62225	31235	A9C62325	33640	A9C62425	35030
40	A9C62240	33205	A9C62340	36590	A9C62440	38950
63	A9C62263	34340	A9C62363	37285	A9C62463	39180
D Curve						
10	A9C63210	31185	A9C63310	33560	A9C63410	34925
16	A9C63216	31200	A9C63316	33580	A9C63416	34955
25	A9C63225	31235	A9C63325	33650	A9C63425	35030

Note: **18mm/module

Energy Meters



- Digital Kilowatt-hour meters designed for sub-metering of active energy (rms) consumed by a single-phase or three-phase electric circuit with or without distributed neutral
- ComReady DB mountable version
- Accuracy class-1
- No External CT required

Description	Reference	Unit MRP [₹]
iEM 2000T 1Ph Energy Meter upto 40A, POP w/o Display	A9MEM2000T	4273
iEM3110 3 Phase Energy Meter Energy Meter with POP Accuracy CL 1.0	A9MEM3110	10502
iEM3150 3 Phase Energy Meter Energy Meter with V,I,Power, Accuracy CL 1.0, with Modbus	A9MEM3150	11472
iEM3155 Multifunction 3 Phase Energy Meter with V,I,F,PF,Power, Energy,1DI/1DO, Multi Tariff, with Modbus Accuracy CL 1.0	A9MEM3155	12154

Note : For Higher Currents /Loads , Select iEM32 Series , CT Operated , Accuracy CL 0.5S

Please contact Customer Care Center for Stockable and Non stockable status of references.

W.E.F. June 01, 2017

Acti 9 | Advanced Communication Technology that Inspires

> Protection devices

- Miniature circuit breakers
- Residual current circuit breakers
- Vigi™ residual current devices
- Surge Protection Devices

> Protection monitoring and supervision

- Indication and tripping auxiliaries
- Remote control auxiliaries
- Automatic recloser auxiliaries



Innovative
Protection monitoring Total control and
Metering @ DB level



Efficient
Manage loads, reduce operating and project
costs, and accurately plan maintenance

> Control and monitoring

- Contactors
- Impulse relays
- Integrated control circuit breakers
- Light indicators
- Push-buttons and selector switches
- Kilowatt hour meters
- Communicating architecture

> Installation system

- IP20B terminals
- Splitter blocks
- Full range of mounting and wiring accessories



Reliable

Dual certifications for one product, 100 percent MCB and RCD coordination, easy ordering and design, error free fast connections



Miniature Circuit Breakers (MCBs)

for circuit protection against Overload and Short Circuit Current Fault

AC Miniature Circuit Breakers - xC60



- Breaking Capacity as per IEC 60898 and IS/IEC 60898, Icn = 10kA
- Breaking Capacity as per IEC 60947-2, Icn = 15kA, upto 40A
- Can be used for DC application upto 60V per pole
- Higher system performance with optimized cost: Cascading*
- Increased System Continuity: Discrimination*
- Higher Installation Life: Energy Limitation Class 3, Fast Closure Mechanism
- Ease, Speed and Flexibility of installation - Biconnect, Line-Load Reversible
- Field-fittable auxiliaries for advance protection and monitoring
- Positive Contact Indication for assurance of disconnection

[In] Rated Current (A)	1 Pole Reference	Unit MRP [₹]	2 Pole Reference	Unit MRP [₹]	3 Pole Reference	Unit MRP [₹]	4 Pole Reference	Unit MRP [₹]
Module Width**	1 mod		2 mod		3 mod		4 mod	
MOQ	12 Nos.		6 Nos.		4 Nos.		3 Nos.	

B curve

6	A9N1P06B	296	A9N2P06B	876	A9N3P06B	1430	A9N4P06B	1930
10	A9N1P10B	296	A9N2P10B	876	A9N3P10B	1430	A9N4P10B	1930
16	A9N1P16B	296	A9N2P16B	876	A9N3P16B	1430	A9N4P16B	1930
20	A9N1P20B	296	A9N2P20B	876	A9N3P20B	1430	A9N4P20B	1930
25	A9N1P25B	296	A9N2P25B	876	A9N3P25B	1430	A9N4P25B	1930
32	A9N1P32B	296	A9N2P32B	876	A9N3P32B	1430	A9N4P32B	1930
40	A9N1P40B	640	A9N2P40B	1415	A9N3P40B	2185	A9N4P40B	2780
50	A9N1P50B	640	A9N2P50B	1415	A9N3P50B	2185	A9N4P50B	2780
63	A9N1P63B	640	A9N2P63B	1415	A9N3P63B	2185	A9N4P63B	2780

C curve

1	A9N1P01C	450	A9N2P01C	1220	A9N3P01C	1885	A9N4P01C	2380
2	A9N1P02C	450	A9N2P02C	1220	A9N3P02C	1885	A9N4P02C	2380
3	A9N1P03C	450	A9N2P03C	1220	A9N3P03C	1885	A9N4P03C	2380
4	A9N1P04C	450	A9N2P04C	1220	A9N3P04C	1885	A9N4P04C	2380
6	A9N1P06C	296	A9N2P06C	876	A9N3P06C	1430	A9N4P06C	1930
10	A9N1P10C	296	A9N2P10C	876	A9N3P10C	1430	A9N4P10C	1930
16	A9N1P16C	296	A9N2P16C	876	A9N3P16C	1430	A9N4P16C	1930
20	A9N1P20C	296	A9N2P20C	876	A9N3P20C	1430	A9N4P20C	1930
25	A9N1P25C	296	A9N2P25C	876	A9N3P25C	1430	A9N4P25C	1930
32	A9N1P32C	296	A9N2P32C	876	A9N3P32C	1430	A9N4P32C	1930
40	A9N1P40C	640	A9N2P40C	1415	A9N3P40C	2185	A9N4P40C	2780
50	A9N1P50C	640	A9N2P50C	1415	A9N3P50C	2185	A9N4P50C	2780
63	A9N1P63C	640	A9N2P63C	1415	A9N3P63C	2185	A9N4P63C	2780

D curve

1	A9N1P01D	454	A9N2P01D	1230	A9N3P01D	1920	----	----
2	A9N1P02D	454	A9N2P02D	1230	A9N3P02D	1920	A9N4P02D	2395
3	A9N1P03D	454	A9N2P03D	1230	A9N3P03D	1920	A9N4P03D	2395
4	A9N1P04D	454	A9N2P04D	1230	A9N3P04D	1920	A9N4P04D	2395
6	A9N1P06D	382	A9N2P06D	918	A9N3P06D	1505	A9N4P06D	2005
10	A9N1P10D	382	A9N2P10D	918	A9N3P10D	1505	A9N4P10D	2005
16	A9N1P16D	382	A9N2P16D	918	A9N3P16D	1505	A9N4P16D	2005
20	A9N1P20D	382	A9N2P20D	918	A9N3P20D	1505	A9N4P20D	2005
25	A9N1P25D	382	A9N2P25D	918	A9N3P25D	1505	A9N4P25D	2005
32	A9N1P32D	382	A9N2P32D	918	A9N3P32D	1505	A9N4P32D	2005
40	A9N1P40D	692	A9N2P40D	1495	A9N3P40D	2315	A9N4P40D	2910
50	A9N1P50D	692	A9N2P50D	1495	A9N3P50D	2315	A9N4P50D	2910
63	A9N1P63D	692	A9N2P63D	1495	A9N3P63D	2315	A9N4P63D	2910

Note: * Please contact nearest Schneider Electric Sales Office or Customer Care Center for coordination chart
**18mm/module

Please contact Customer Care Center for Stockable and Non stockable status of references.

☑ NORMAL STOCK ITEMS

W.E.F. June 01, 2017

Acti 9

Advanced Communication
Technology that Inspires...

Miniature Circuit Breakers (MCBs)

for circuit protection against Overload and Short Circuit Current Fault

AC Miniature Circuit Breakers - C120



- Breaking capacity as per IEC 60898, Icn = 10kA/15kA
- Positive Contact Indication for assurance of disconnection
- Degree of pollution: 3 (suitable for industrial environment)
- Operating Temperature: -30 to 70°C
- Terminal connections: Flexible cables up to 35 sq.mm; Rigid cables up to 50 sq.mm

[In] Rated Current (A)	1 Pole Reference	Unit MRP [₹]	2 Pole Reference	Unit MRP [₹]	3 Pole Reference	Unit MRP [₹]	4 Pole Reference	Unit MRP [₹]
Module Width**	1.5 mod		3 mod		4.5 mod		6 mod	
MOQ	12 Nos.		6 Nos.		4 Nos.		3 Nos.	

C120N (10kA)

80	A9N18357	2340	A9N18361	5190	A9N18365	8175	A9N18372	10655
100	A9N18358	2625	A9N18362	5535	A9N18367	8715	A9N18374	11105
125	A9N18359	2830	A9N18363	6085	A9N18369	9655	A9N18376	12565

C120H (15kA)

80	A9N18446	2805	A9N18457	6310	A9N18468	9610	A9N18479	12340
100	A9N18447	3095	A9N18458	6465	A9N18469	10470	A9N18480	13300
125	A9N18448	3380	A9N18459	7340	A9N18470	11295	A9N18481	14450

DC Miniature Circuit Breakers - C60H



- Specially designed MCB for enhanced protection in DC installation
- Magnetic arch chutes to quick break DC current in event of fault
- Breaking capacity 6kA as per IEC 60947-2
- Voltage Rating: 1P - 250 V DC & 2P - 500 V DC
- Impulse Voltage: 6 kV
- Higher Installation Life: Energy Limiting Class: 3

[In] Rated Current (A)	Module Width 18mm/module	1 Pole Reference	Unit LP [₹]	Module Width 18mm/module	2 Pole Reference	Unit LP [₹]
MOQ		12 Nos.			6 Nos.	

C60H-DC

0.5	1	A9N61500	870	2	A9N61520	1840
1	1	A9N61501	770	2	A9N61521	1595
2	1	A9N61502	770	2	A9N61522	1595
3	1	A9N61503	770	2	A9N61523	1595
4	1	A9N61504	770	2	A9N61524	1595
5	1	A9N61505	770	2	A9N61525	1595
6	1	A9N61506	632	2	A9N61526	1350
10	1	A9N61508	632	2	A9N61528	1350
16	1	A9N61511	632	2	A9N61531	1350
20	1	A9N61512	632	2	A9N61532	1350
25	1	A9N61513	632	2	A9N61533	1350
32	1	A9N61515	632	2	A9N61535	1350
40	1	A9N61517	866	2	A9N61537	1915
50	1	A9N61518	866	2	A9N61538	1915
63	1	A9N61519	866	2	A9N61539	1915

Special application MCBs



Solar Application – PV DC

- DC MCB for multi string PV installations
- Operating Voltage: 800V DC
- Current Rating up to 25A
- Complies to IEC / EN 60947-2



Rail Application* (including Rolling Stock)

- Fire & smoke Resistant – Level 2 (NF F 16-101, NF F 16-102)
- Shock & vibration resistant (IEC 61373) – Cat 1, Class B
- Breaking Capacity: up to 25kA
- Complies to IEC / EN 60947-2



UL MCB

- Type: UL1077, UL489
- Breaking Capacity of 10kA
- Complies to IEC 60947-2 / UL1077 / UL489 / CSA

Note:

Please contact nearest Schneider Electric sales office or Customer Care for Reference and prices of Application Specific MCBs

*Rail Application RCDs are also available on demand

**18mm/module

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS


W.E.F. June 01, 2017

Acti 9
Advanced Communication
Technology that Inspires...

Miniature Circuit Breakers (MCBs)

for circuit protection against Overload and Short Circuit Current Fault

AC Miniature Circuit Breakers - NG125

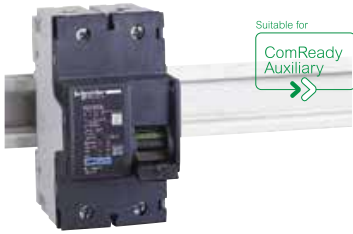

- Compliance to IEC / EN 60947-2
- High Breaking Capacity MCBs – up to 50kA
- Current Rating up to 125A
- Trip on fault indication on front face of MCB
- Suitability for isolation in the industrial sector to IEC/EN 60947-2
- Available in B, C, D Curves

[In] Rated Current (A)	1 Pole Reference	Unit LP [₹]	2 Pole Reference	Unit LP [₹]	3 Pole Reference	Unit LP [₹]	4 Pole Reference	Unit LP [₹]
Module Width**	1.5 mod		3 mod		4.5 mod		6 mod	
NG125N – 25kA Breaking Capacity								
10	18610	*	18621	*	18632	*	18649	*
16	18611	*	18622	*	18633	*	18650	*
20	18612	*	18623	*	18634	*	18651	*
25	18613	*	18624	*	18635	*	18652	*
32	18614	*	18625	*	18636	*	18653	*
40	18615	*	18626	*	18637	*	18654	*
50	18616	*	18627	*	18638	*	18655	*
63	18617	*	18628	*	18639	*	18656	*
80	18618	*	18629	*	18640	*	18658	*
NG125H – 36kA Breaking Capacity								
10	18705	*	18714	*	18723	*	18732	*
16	18706	*	18715	*	18724	*	18733	*
20	18707	*	18716	*	18725	*	18734	*
25	18708	*	18717	*	18726	*	18735	*
32	18709	*	18718	*	18727	*	18736	*
40	18710	*	18719	*	18728	*	18737	*
50	18711	*	18720	*	18729	*	18738	*
63	18712	*	18721	*	18730	*	18739	*
80	18713	*	18722	*	18731	*	18740	*
NG125H – 50kA Breaking Capacity								
10	18777	*	18788	*	18799	*	18810	*
16	18778	*	18789	*	18800	*	18811	*
20	18779	*	18790	*	18801	*	18812	*
25	18780	*	18791	*	18802	*	18813	*
32	18781	*	18792	*	18803	*	18814	*
40	18782	*	18793	*	18804	*	18815	*
50	18783	*	18794	*	18805	*	18816	*
63	18784	*	18795	*	18806	*	18817	*
80	18785	*	18796	*	18807	*	18818	*

*Price on Request – Please contact Schneider Electric Customer Care Center for Prices

**18mm/module

Note: Reference provided above are for C Curve MCBs – B and D Curve details available on request

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

Residual Current Devices (RCDs) - For Human and Fire Protection



**30
mA**

Use of **30mA RCDs** is now **mandatory** for all **domestic intallations** in India {CEA Amendment regulation 2015*}



Schneider Electric provides voltages independent RCDs which work on current sensing technology and provide protection from residual current even at extra low voltages (down to zero volts) and in case of break of neutral.

**SI
Type**

Schneider Electric offers SI RCD built to operate in electroically polluted or intallation in aggressive environments:

- Flourescent / Variable lighting with Electronic ballast
- Powerful IT / Telecom equipment / Air conditioning
- Severe Atmosphere - High lighting risk / Swimming pools

* for Measures relating to Safety and Electric supply

Acti 9

Advanced Communication
Technology that Inspires...

Residual Current Devices

for protection against Risk of Shock / Electrocutation and Risk of Fire in case of Earth Leakage Current.

AC Residual Current Circuit Breakers - xID



- Complies to standards IEC/EN 61008-1 and IS 12640
- AC Class protection
- Selective range available for time based discrimination
- Easy Monitoring: Earth fault indication and Test Button on front face
- Operating temperature up to +70°C
- Mandatory to use OF-S auxiliary to add any indication or tripping auxiliary

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit MRP [₹]	Module Width 18mm/module	4 Pole Reference	Unit MRP [₹]
25	30	2	A9N16201	3140	4	A9N16251	4290
	100	2	A9N16203	3360	4	A9N16253	4470
	300	2	A9N16202	3460	4	A9N16252	4605
40	30	2	A9N16204	3700	4	A9N16254	4305
	100	2	A9N16205	3915	4	A9N16255	4500
	300	2	A9N16206	4025	4	A9N16256	4675
63	30	2	A9N16208	4370	4	A9N16258	4985
	100	2	A9N16209	4615	4	A9N16259	5315
	300	2	A9N16210	4710	4	A9N16260	5340
80	30	2	A9N16212	7355	4	A9N16261	8625
	100	2	A9N16213	7340	4	A9N16262	8605
	300	2	A9N16214	7475	4	A9N16263	8655

AC Residual Current Circuit Breakers (RCCBs) - ID



- Complies to standards IEC 61008-1 and VDE 0664
- AC Class protection
- Degree of pollution: 3 (suitable for industrial environment)
- Electrical ON/OFF indication by using OFSP auxiliary

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit LP [₹]
4P	100	30	4	**A9R11491	10225
		100	4	**A9R12491	10580
	125	30	4	16905	31320
		100	4	16906	31945
		300	4	16907	32095

Note: **For 100A RCCB Auxiliary kindly contact Customer Care

AC Residual Current Breaker Overload (RCBO) - DPN N Vigi



- Complies to standards IEC/EN 61009
- AC Class Protection; Tripping characteristics - C curve
- Overvoltage category (IEC 60364): IV
- Suitable for indication & tripping auxiliaries

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit LP [₹]
1P+N	6	30	2	A9N19661	4555
		300	2	A9N19681	4710
	10	30	2	A9N19663	4555
		300	2	A9N19683	4710
	16	30	2	A9N19665	4555
		300	2	A9N19685	4710
	20	30	2	A9N19666	4555
		300	2	A9N19686	4710
	25	30	2	A9N19667	4555
		300	2	A9N19687	4710
	32	30	2	A9N19668	4780
		300	2	A9N19688	4950
	40	30	2	A9N19669	5875
		300	2	A9N19689	6030

Note: Application specific RCDs also available with 10mA, 500mA and 1000mA sensitivities | Please contact nearest Schneider Electric Sales Office or Customer Care Center for Reference and Prices

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

Acti 9

Advanced Communication
Technology that Inspires...

Residual Current Devices

for protection against Risk of Shock / Electrocutation and Risk of Fire in case of Earth Leakage Current.

SI Type Residual Current Circuit Breakers (RCCBs) - xID SI



- Complies to standard IEC/EN 61008-1
- SI RCDs offer enhanced immunity against Electrical Disturbances; Polluted and Corrosive environments - Guaranteed performance in harsh operating conditions
- Ensures continuity of supply in networks with:
 - Transient overvoltages
 - Loads generating HF leakage current i.e. harmonics
 - Loads generating continuous leakage current
- Ensures tripping on genuine earth fault in networks with:
 - Pulsating DC components
 - HF applications which "Blinds" (non-tripping) the conventional RCDs

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit LP [R]	Module Width 18mm/module	4 Pole Reference	Unit LP [R]
25	30	2	A9N16234	6640	4	A9N16321	7400
40	30	2	A9N16237	6970	4	A9N16324	7635
63	30	2	A9N16240	7170	4	A9N16327	7835
	300	2	A9N16246	7230	4	A9N16334	8155

Vigi Block for xC60 (Add-on RCD Module, 2 & 4 Pole)



Suitable for
ComReady Auxiliary

- Flexibility to use MCB of any tripping curve to suit applications, ensuring best 3 in 1 protection
- No auxiliary supply required
- AC Class protection
- Degree of pollution: 3 (suitable for industrial environment)
- Immune to nuisance tripping due to transient over voltages

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit LP [R]	Module Width 18mm/module	4 Pole Reference	Unit LP [R]
25	30	1.5	A9N26581	4075	3	A9N26595	4895
	100	1.5	A9N26582	5090	3	A9N26596	5280
	300	1.5	A9N26583	5250	3	A9N26597	5440
63	30	2	A9N26611	5705	3.5	A9N26643	5995
	100	2	A9N26612	5930	3.5	A9N26644	6115
	300	2	A9N26613	6050	3.5	A9N26645	6235

Note: Vigi Block for High Rating up to 125A (C120) and High Breaking Capacity (NG125) available on demand

SI Type Residual Current Breaker Overload (RCBO) - DPN N Vigi SI



Suitable for
ComReady Auxiliary


- Complies to standard IEC/EN 61009
- Ensures continuity of supply in networks with:
 - Transient overvoltages
 - Loads generating HF leakage current i.e. harmonics
 - Loads generating continuous leakage current
- Ensures tripping on genuine earth fault in networks with :
 - Pulsating DC components
 - HF applications which "Blinds" (non-tripping) the conventional RCDs

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit LP [R]
1P+N	6	30	2	A9N19631	*
		300	2	A9N19641	*
	10	30	2	A9N19632	*
		300	2	A9N19642	*
	16	30	2	A9N19634	*
		300	2	A9N19644	*
	20	30	2	A9N19635	*
		300	2	A9N19645	*
	25	30	2	A9N19636	*
		300	2	A9N19646	*
	32	30	2	A9N19637	*
		300	2	A9N19647	*
	40	30	2	A9N19638	*
		300	2	A9N19648	*

*For Prices, please contact nearest Schneider Electric Sales Office or Customer Care Center

Common Auxiliaries for xC60 / C120 / RCDs Range

- Field-fittable auxiliaries (clip fitted) mounted on left side with maximum width of 54mm
- Order: Tripping Auxiliaries (MN first) followed by Indication Auxiliaries (SD first)

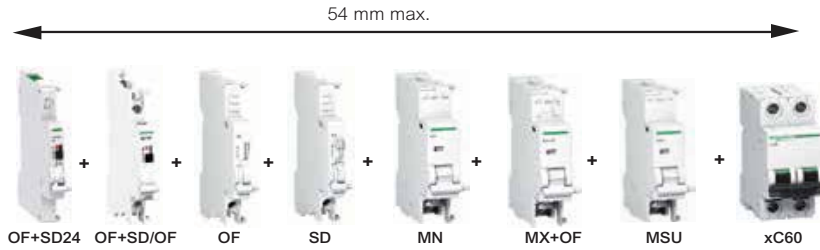

Type	Module Width 18mm/module	Reference	Unit LP [₹]
Indication Auxiliaries			
OF Auxiliary Switch: for ON/OFF indications	0.5	A9N26924	868
SD Alarm Switch: for Trip on fault indications	0.5	A9N26927	1020
OF + SD/OF Auxiliary switch	0.5	A9N26929	2715
OF+SD24 auxiliary contact (ComReady)	0.5	A9N26899	2275
Protection Auxiliaries – Trip Indication on front face			
MN Under-voltage Release 220-240V AC	1	A9N26960	2950
MSU Over-voltage Release 275V AC	1	A9N26500	4330
Tripping Auxiliaries – Trip Indication on front face			
MX + OF Shunt Release 110-415V AC: for Remote tripping of Circuit Breaker	1	A9N26946	2375
MX + OF Shunt Release 12-24V AC/DC: for Remote tripping of Circuit Breaker	1	A9N26948	2375
Auxiliary Switch for RCCBs – Mandatory for use of Auxiliaries with RCCBs			
Auxiliary switch for RCCB up to 80A (OF-S)	0.5	A9N26923	1155
Auxiliary switch for RCCBs 125A (OFSP)	0.5	16940	1780

Accessories



Type	Description	Reference	Unit LP [₹]
Rotary Handle*	Breaker Switching Sub-Assembly	27046	3275
	Extended, Disconnectable handle	27047	2025
Padlock** (bag of 2)		26970	786
Multicable terminal for 3 copper cables**		19096	1260
Aluminum cable terminal**		27060	476
Spacer		A9N27062	198

* for xC60, C120, DPN N Vigi, C60H-DC, xSW - Multi poles only
**for xC60, xID, DPN N Vigi, C60H-DC, xSW, C60PV-DC

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

Protection Against Lightning Strikes And Switching Surges



For all low voltage switchboards and electrical enclosures:

Comprehensive range

- To ensure the protection of equipment connected to:
- low voltage networks,
- telecommunications networks,
- computer networks.
- Easy to implement and use.
- Compatibility with all earthing systems (TT, TNS, TNC, IT).
- Technical and aesthetic consistency.

Continuity of service and certified safety

Schneider Electric certified coordination between the surge arrester and its disconnection circuit breaker.

Compliance with standards: IEC/EN 61643-11.



More and more electrical equipment today is sensitive to overvoltages caused by lightning.



90%

of power outlets supply equipment incorporating electronic devices.



iQuick PRD "built-in" technology surge arresters, a Schneider Electric innovation, incorporate their own disconnection circuit breaker: easy to choose and simple to install for greater effectiveness.



Up to **30%** of installation time saved.

Surge Protection Devices

for protection of equipment against Lightning and Switching surges

Surge Arresters - Type 1+2



- Complies to IEC 61643-1 and EN 61643-11
- Withdraw able type: Easy Replacement
- Inbuilt SPD health Indicator: Also available with remote signaling
- For protection against Direct lightning surge, Indirect lightning surge, Switching surge
- Iimp up to 25kA & Imax upto 40kA
- **Always use a Back-up MCB with your SPD**
- Maximum Operating Voltage [Uc]: 350V

Type	poles	Description	Module Width 18mm/module	Reference	Unit LP
PRD1 25r		1P	2	16329	12190
		1P + N	4	16330	26815
		3P	6	16331	40215
		3P + N	8	16332	49965

Surge Arresters iPRD- Type 2 (Withdrawable type) (TT, TN-S, TN-C Systems)



- In conformance with standards IEC 61643-11/2011 T2 and EN 61643-11 Type 2
- For protection against Indirect lightning surge and Switching surge
- Inbuilt health Indicator
- Response time < 25ns
- I_{max} (8/20 μs): 65/40/15/8kA
- Maximum Operating Voltage [Uc]: 340V
- Level of protection, U_p: 1.0 - 2.0 kV
- Remote indication contact with 8r/20r/40r/65r
- **Always use a Back-up MCB with your SPD**

Type	Rated Voltage (V)	Pole Description	Module Width 18mm/module	Reference	Unit LP
iPRD8	230	1P	1	A9L08100	3780
	230	1P+N	2	A9L08500	7070
	230/400	3P	3	A9L08300	9545
	230/400	3P+N	4	A9L08600	14420
iPRD8r	230	1P+N	2	A9L08501	8480
	230/400	3P+N	4	A9L08601	17305
iPRD20	230	1P	1	A9L20100	4240
	230	1P+N	2	A9L20500	8895
	230/400	3P	3	A9L20300	11390
iPRD20r	230/400	3P+N	4	A9L20600	16410
	230	1P+N	2	A9L20501	10575
iPRD40	230/400	3P+N	4	A9L20601	19690
	230	1P	1	A9L40100	5010
	230	1P+N	2	A9L40500	10240
	230/400	3P	3	A9L40300	14710
iPRD40r	230/400	3P+N	4	A9L40600	20515
	230	1P	1	A9L40101	6010
	230	1P+N	2	A9L40501	13210
iPRD65r	230/400	3P	3	A9L40301	19805
	230/400	3P+N	4	A9L40601	24615
	230	1P	1	A9L65101	8035
	230	1P+N	2	A9L65501	16835
iPRD65r	230/400	3P	3	A9L65301	21975
	230/400	3P+N	4	A9L65601	28515

Spare Cartri_DGes for iPRD



- Spare cartri_DGes for iPRD8r, iPRD20r, iPRD40r and iPRD65r
- End of life indication available on front face
- These cartri_DGes are not compatible with Old SPD range (A9L16...)**

Type	Spare cartri_DGes for	Reference	Unit LP
iPRD 65-350	iPRD65r	A9L65102	5030
iPRD 40-350	iPRD40, iPRD40r	A9L40102	3870
iPRD 20-350	iPRD20, iPRD20r	A9L20102	3095
iPRD 8-350	iPRD8, iPRD8r	A9L08102	2710
iPRD Neutral	All products (1P+N, 3P+N)	A9L00002	4070

**Spare Cartri_DGes for Old SPD Range (A9L16...) are available on demand - please contact nearest Schneider Electric Sales Office or Customer Care for Reference and prices
Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

Surge Protection Devices

for protection of equipment against Lightning and Switching surges

iQuick PRD - Type 2 with inbuilt MCB



- Compact SPD with in-built back up MCB - saving on space, MCB selection, wiring time
- Compliance to EN 61643-11
- Withdrawable Type - Cost Efficient - Allows damaged cartri_DGes to be replaced without having to replace entire SPD
- Inbuilt SPD Health Indicator on front face of device; Remote signaling functionality also available
- Incoming Protection: iQuick PRD 40r (High Risk level) and iQuick PRD 20r (Moderate Risk level)
- Secondary Protection: iQuick PRD 8r is cascade mounted with incoming surge arresters

Type	Poles Discription	Module Width 18mm/module	Reference	Unit LP [₹]
iQuick PRD 8r	1P+N	4	A9L16298	10215
	3P	6.5	A9L16299	15010
	3P+N	7.5	A9L16300	18680
iQuick PRD 20r	1P+N	4	A9L16295	12255
	3P	6.5	A9L16296	18015
	3P+N	7.5	A9L16297	22415
Quick PRD 40r	1P+N	4	A9L16292	14310
	3P	6.5	A9L16293	21455
	3P+N	7.5	A9L16294	26655

Note: Spare / Replacement Cartri_DGes available - For Reference and prices contact nearest sales office or customer care

Photovoltaic surge arresters



- Protection for photovoltaic panels and the DC input to the inverter from overvoltages due to a lightning strike
- Type 2 surge arresters
- Should be installed in switchboard inside the building. If switchboard is located outside, it must be weatherproof
- Withdrawable surge arrester allows damaged cartri_DGes to be replaced quickly
- Inbuilt SPD Health Indicator on front face of device; Remote signaling functionality also available

Type	U (cpv) Maximum Operating Voltage (V)	Module Width 18mm/module	Reference	Unit LP [₹]
iPRD 40r	800	3	A9L40271	8430
	1000	3	A9L40281	9630

Note: Spare / Replacement Cartri_DGes available - For Reference and prices contact nearest sales office or customer care

Surge Arresters for Communication Networks



- Analogue telephone line protection: iPRC surge arrester wired in series to the private installation input, protects the telephones, the modems (including ADSL) etc
- Protection for 2 low-current lines without common potential or 4 lines with common reference potential
- iPRI protects measuring instrument and PLC sensor inputs and the DC power supply inputs up to 53 V and AC power supply inputs up to 37 V

Type	[Ue] Operational Voltage (V)	Module Width 18mm/module	Reference	Unit LP [₹]
PRI	48 V DC	1	A9L16339	14535
PRC	130 V AC	1	A9L16337	8895

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

Acti 9
Advanced Communication
Technology that Inspires...

Control and Command Products

for Load Control, Switching and Indication

Isolator - xSW



- Complies to IEC/EN 60947-3
- Switching duty: AC-22
- Impulse voltage: 6kV
- DC application: 48V (110V with 2 poles in series)
- Short circuit withstand 20 In for 1 second
- Upto 80A Bi connect terminals & 100A to 125A with mono connect terminals

Poles Description	[In] Rated Current (A)	Module Width 18mm/module	MOQ	Reference	Unit MRP [₹]
2	40	2	6	A9S2P040	538
	63	2	6	A9S2P063	712
	80	2	6	A9S2P080	856
	100	2	6	A9S2P100	1230
	125	2	6	A9S2P125	1270
3	40	3	4	A9S3P040	948
	63	3	4	A9S3P063	1110
4	40	4	3	A9S4P040	1195
	63	4	3	A9S4P063	1310
	80	4	3	A9S4P080	1735
	100	4	3	A9S4P100	1935
	125	4	3	A9S4P125	2095

Selector Switch - iSSW



- Complies to IEC 60947-5-1 and IEC 60669-1
- Rating 20A, 250V AC
- Electrical life (AC22): 30,000 cycles
- Connection: tunnel terminals cables up to 10 sq. mm

No. of positions	Poles Description	Contacts	Module Width 18mm/module	MOQ	Reference	Unit MRP [₹]
2	1	1 C/O	1	12	A9E18070	1090
	2	2 C/O	2	6	A9E18071	1505
		1NO + 1NC	1	12	A9E18072	874
3	1	1 C/O	1	12	A9E18073	1070
	2	2 C/O	2	6	A9E18074	1815

iRO Buzzers



- Audible indication in housing and the tertiary sector
- Sound level of 70dBA at a distance of 60cm

Voltage	Module Width 18mm/module	Reference	Unit LP [₹]
230V AC	1	A9A15322	926
8..12V AC	1	A9A15323	776

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

Acti 9
Advanced Communication
Technology that Inspires...

Control and Command Products
for Load Control, Switching and Indication

ICT Contactors



- Complies with standards IEC 1095, E N 61095
- 4 operating modes switch on front face :
 - Automatic mode
 - Temporary "ON" mode
 - Permanent "ON" mode
 - Shutdown
- Mechanical contact position Indicator
- Safe installation maintenance: lock the contactor in ON position
- Silent operation (20dB) for entire range

Type	Rating (A)	No. of Contacts	Module Width 18mm/module	Reference	Unit LP [₹]
1P	25	1NO	1	A9C20731	1690
	16	2NO	1	A9C22712	1740
2P	25	2NO	1	A9C20732	2080
	40	2NO	2	A9C20842	3560
	63	2NO	2	A9C20862	4550
3P	25	3NO	2	A9C20833	2640
	40	3NO	2	A9C20843	5955
	63	3NO	3	A9C20863	6475
4P	25	4NO	2	A9C20834	2805
	40	4NO	2	A9C20844	6075
	63	4NO	3	A9C20864	7325
	63	2NO + 2NC	3	A9C20868	7325

Note: 100A Contactor in 2P / 4P - available on request

iTL Impulse Relays



- Complies with standards IEC/EN 60669-2-2
- Safe maintenance: disconnection of remote control by selector switch
- Manual Controls on front face: 0-I toggle
- Mechanical contact position Indicator
- Maximum 5 operations/min. and 100 switching operations/day
- Degree of pollution: 3 (suitable for industrial environment)

Type	Rating (A)	Control Voltage	No. of Contacts	Module Width	Reference	Unit LP [₹]
1P	16	230-240 VAC	1NO	1	A9C30811	1090
	32	230-240 VAC	1NO	1	A9C30831	1370
2P	16	230-240 VAC	2NO	1	A9C30812	1795
	32	230-240 VAC	2NO	1	A9C30831 + A9C32836	4255
3P	16	230-240 VAC	1NO+1NO/NC+1NO	2	A9C30811 + A9C32816	3405
	32	230-240 VAC	1NO+1NO/NC+1NO	2	A9C30831 + 2 x A9C32836	7140
4P	16	230-240 VAC	4NO	2	A9C30814	3725
	32	230-240 VAC	4NO	2	A9C30831 + 3 x A9C32836	10025

iIL Indicator Lights



- Complies with standard IEC 60947-5-1
- Indicator light with LED technology
- Service life 100,000 hours with constant luminous efficiency

Type	Colour	Module Width 18mm/module	Reference	Unit LP [₹]
Single Indicator light	Red	1	A9E18320	1025
	Green	1	A9E18321	1025
	Blue	1	A9E18323	1025
	Orange	1	A9E18324	1025
3 phase voltage presence light	Red/Red/Red	1	A9E18327	2565
Single Push Button (1 NO+ 1NC)	Grey	1	A9E18033	1525

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

Acti 9

Distribution Boards

Spectacular Design

Blends seamlessly with interiors



Unique Rounded Corners | Color - RAL 9003 white | Designer Rotary Knob

Maximized Wiring Space

Convenient and Safe wiring



15% more wiring area | Reduced U-box Collar | Removable Frame, Centre plate & Gland plate

Adaptable

Total Flexibility for ease of installation and usage



Surface and Flush installation | Field fittable key lock provision | Reversible Door

Inspiring the **S.M.A.R.T.** choice!!!

Robust Architecture

Perfect blend of Strength & Weight



High Strength-to-Weight ratio | RoHS and REACH Compliance – ideal solution for GREEN Buildings

Technically Proven

Safety Guaranteed





Designed and Manufactured as per IS 8623 - 1&3 | IP and IK test by ERDA & CPRI | Glow wire tested



Acti 9

Distribution Boards

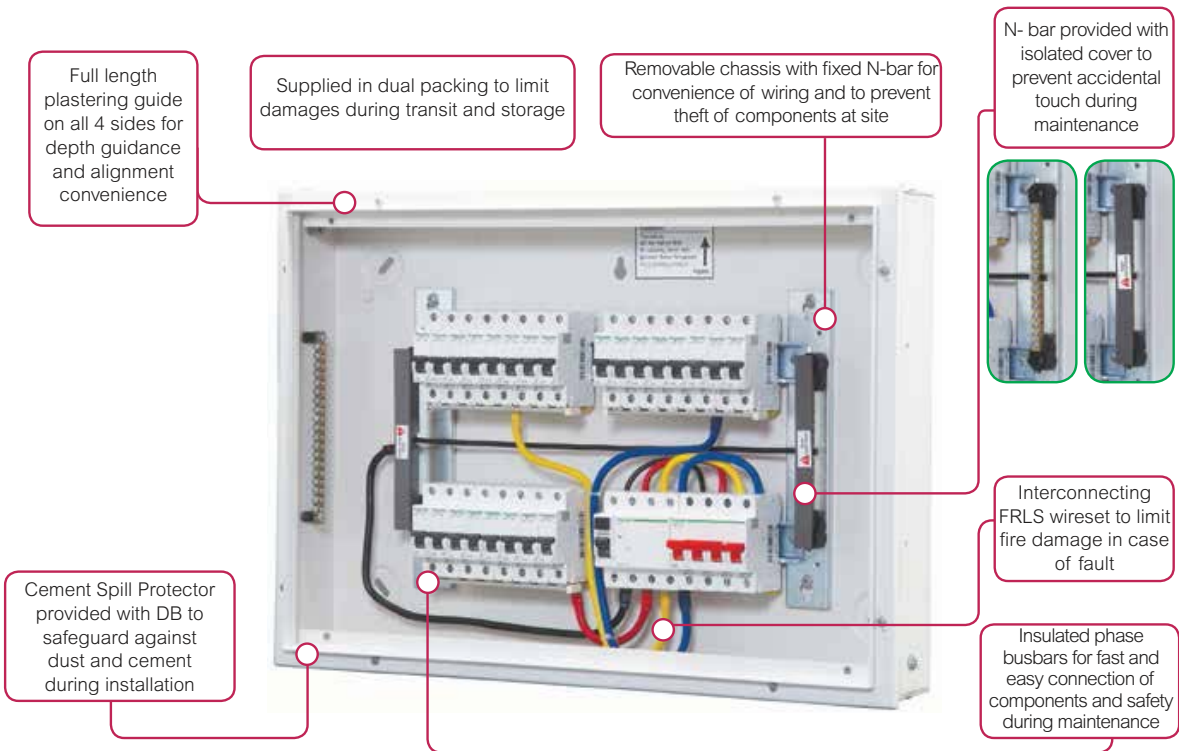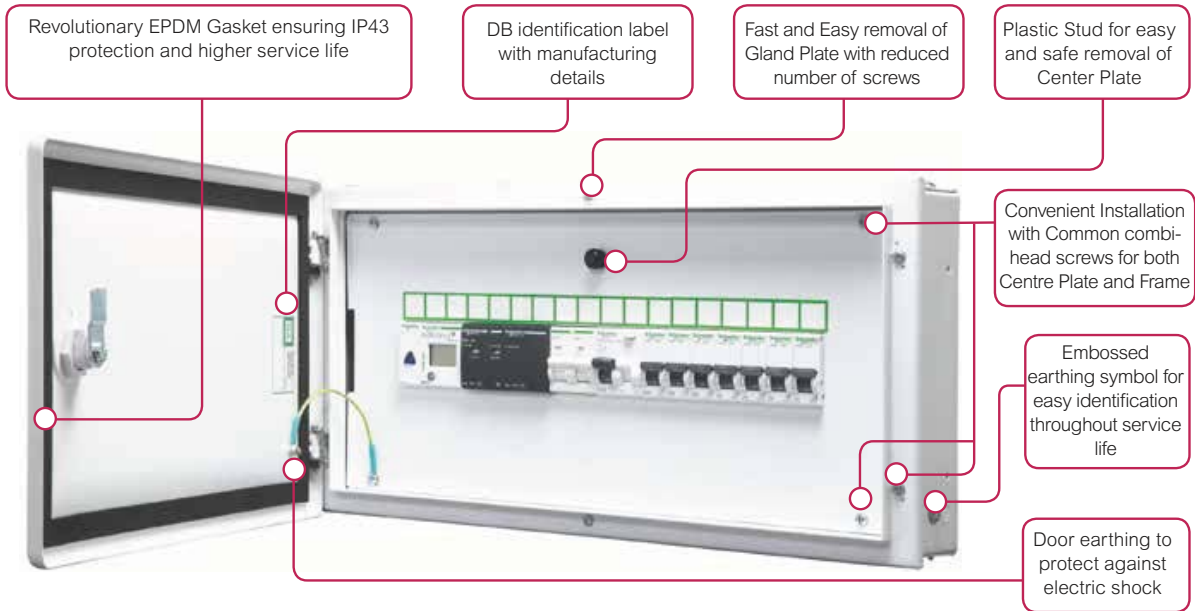

Acti 9

Advanced Communication
Technology that Inspires...

Modular Distribution Boards - Metallic

Metal Enclosures



- Metal Enclosure to mount individual Modular Device feeding directly to the load or final distribution board

Description	Total Module Cutout	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
2 way	1 / 2	A9HMES02 <input checked="" type="checkbox"/>	666	-	-
4 way	3 / 4	A9HMES04 <input checked="" type="checkbox"/>	666	-	-

SPN DBs



- SPN DB for distribution of Single Phase Neutral supply to respective load MCBs
- Incomer - DP RCCB/RCBO/Isolator/MCB
- Outgoing - SP MCBs

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
6 way	6	A9HSNS06	1295	A9HSND06 <input checked="" type="checkbox"/>	1860
8 way	8	A9HSNS08 <input checked="" type="checkbox"/>	1605	A9HSND08 <input checked="" type="checkbox"/>	2125
12 way	12	A9HSNS12	1900	A9HSND12 <input checked="" type="checkbox"/>	2555
18 way	18	A9HSNS18	2505	A9HSND18 <input checked="" type="checkbox"/>	3275

TPN DBs



- Standard TPN DBs for distribution of Three Phase and Neutral supply
- Incomer - FP RCCB/RCBO/Isolator/MCB
- Outgoing - SP MCBs
- TPN DBs can be converted to PPI DB using 'PPI Kit' provided on next page

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
4 way eco	4 + 12	-	-	A9HTND04E <input checked="" type="checkbox"/>	3990
4 way	8 + 12	A9HTNS04	3530	A9HTND04 <input checked="" type="checkbox"/>	4190
6 way	8 + 18	A9HTNS06	4355	A9HTND06 <input checked="" type="checkbox"/>	5160
8 way	8 + 24	A9HTNS08	5115	A9HTND08 <input checked="" type="checkbox"/>	6195
12 way	8 + 36	A9HTNS12	7585	A9HTND12 <input checked="" type="checkbox"/>	9295

Flexi Tier DBs



- Flexi DBs give total flexibility to mount any type and size of Modular devices as per load requirement
- Provided with N-Bar and E-Bar
- Flexi Tier DBs can be converted to PPI DB using 'PPI Kit' provided on next page

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
2 Tier 24 Modules	2 x 12	-	-	A9HFD224	5260
3 Tier 36 Modules	3 x 12	-	-	A9HFD336	6320
4 Tier 40 Modules	4 x 10	-	-	A9HFD440 <input checked="" type="checkbox"/>	6680
4 Tier 56 Modules	4 x 14	-	-	A9HFD456 <input checked="" type="checkbox"/>	6980

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

Acti 9

Advanced Communication
Technology that Inspires...

Modular Distribution Boards - Metallic

Per Phase Isolation DBs

- PPI DBs to mount DP Residual Current Device (RCD) at an individual phase level to isolate the faulty phase in case of earth leakage and ensure continuity of supply to other healthy phases
- Incomer - Modular (FP MCB/Isolator) using PPI Kit / MCCB100A (TP/FP Compact NSX or EasyPact CVS)
- Sub-Incomer - DP RCCB/RCBO
- Outgoing - SP MCBs

Description	Total Module Cutout (Incomer + Sub-Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP ₹	Double Door Metal (IP43) Reference	Unit MRP ₹
12 way	100A MCCB + 6 + 36	-	-	A9HPID12M	13920

PPI Kit (to convert TPN and Flexi Tier DBs to PPI DB)



- Set of accessories to convert TPN DBs and 4 tier Flexi DBs to PPI DB
- Kit is provided with additional required quantity of N-Bar, wire set, Busbars (only for Flexi Tier) and Mounting Kit (only for TPN)

Description	Reference	Unit MRP ₹
PPI Kit for 6way TPN DB (2+4w PPI DB)	A9HKIT04 <input checked="" type="checkbox"/>	2705
PPI Kit for 8way TPN DB (2+6w PPI DB)	A9HKIT06 <input checked="" type="checkbox"/>	3165
PPI Kit for 12way TPN DB (2+10w PPI DB)	A9HKIT10 <input checked="" type="checkbox"/>	3490
PPI Kit for 4T40M Flexi DB (2+8w PPI DB)	A9HKIT08 <input checked="" type="checkbox"/>	5610
PPI Kit for 4T56M Flx DB (2+12w PPI DB)	A9HKIT12 <input checked="" type="checkbox"/>	6205

Phase Segregated DBs



- Phase Segregated DBs to provide total safety for installer and maintenance personnel, by compartmentalizing each Phase and separating Incomer, Sub-Incomer and Outgoing
- Offers better continuity of supply in case of faults during maintenance at DB level.
- Incomer - Modular (FP MCB/Isolator) / MCCB 100A (TP/FP during maintenance Compact NSX or EasyPact CVS)
- Sub-Incomer - DP RCCB/RCBO
- Outgoing - SP MCBs

Description	Total Module Cutout (Incomer + Sub-incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP ₹	Double Door Metal (IP43) Reference	Unit MRP ₹
6 way	8 + 12 + 18	-	-	A9HPGD06 <input checked="" type="checkbox"/>	12365
8 way	8 + 12 + 24	-	-	A9HPGD08 <input checked="" type="checkbox"/>	13810
12 way	8 + 12 + 36	-	-	A9HPGD12	17335
12 way with MCCB l/c	100A MCCB + 12 + 36	-	-	A9HPGD12M	23395

VTPN DBs for Modular Incomer



- Ideal solution to distribute power supply to both 3 Phase and 1 Phase loads in the same DB
- Incomer - FP RCCB/RCBO/Isolator/MCB
- Outgoing - SP MCBs / TP MCBs

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP ₹	Double Door Metal (IP43) Reference	Unit MRP ₹
4 way	8 + 12	-	-	A9HVTD04 <input checked="" type="checkbox"/>	10365
8 way	8 + 24	-	-	A9HVTD08	13185
12 way	8 + 36	-	-	A9HVTD12	17650

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017



Modular Distribution Boards - Metallic

VTPN DBs for MCCB Incomer



- DBs for higher incoming current distribution up to 250A
- Incomer - TP/FP Compact NSX or EasyPact CVS MCCB up to 250A
- Outgoing - SP MCBs / TP MCBs

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP ₹	Double Door Metal (IP43) Reference	Unit MRP ₹
4 way	100A MCCB + 12	-	-	A9HVD04L	11350
8 way	100A MCCB + 24	-	-	A9HVD08L	14385
12 way	100A MCCB + 36	-	-	A9HVD12L	19135
4 way	160A MCCB + 12	-	-	A9HVD04M	12495
8 way	160A MCCB + 24	-	-	A9HVD08M	15570
12 way	160A MCCB + 36	-	-	A9HVD12M	20785
8 way	250A MCCB + 24	-	-	A9HVD08H	26910
12 way	250A MCCB + 36	-	-	A9HVD12H	28370

ComReady DBs



- Designed to house Acti 9 communication system
- Supplied with Double DIN rail, E-Bar and Wire channel.
- Accessories to convert Flexi Tier DB into ComReady DB available on request

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP ₹	Double Door Metal (IP43) Reference	Unit MRP ₹
1 Tier 24 Modules	24	-	-	A9HCRD124	7040
2 Tier 48 Modules	48	-	-	A9HCRD248	11405

Metal Clad P&S Units



- Plug & Socket Unit with Electra Plug & Socket and provision to mount modular protection devices to feed the end load directly

Description	Total Module Cutout	Single Door (IP30) Reference	Unit MRP ₹	Double Door Metal (IP43) Reference	Unit MRP ₹
10A 1P+N+E P&S	2	A9HMS210	1700	-	-
20A 1P+N+E P&S	2	A9HMS220	1825	-	-
30A 3P+E P&S	4	A9HMS330	3995	-	-

Industrial P&S Units (provision to mount PratiKa Sockets)



- Plug & Socket Unit with provision to mount PratiKa straight / angled* socket and modular protection devices to feed the end load directly

Description	Total Module Cutout	Single Door (IP30) Reference	Unit MRP ₹	Double Door Metal (IP43) Reference	Unit MRP ₹
16A 3P PK P&S	2	A9HKS316	1570	-	-
32A 3P PK P&S	2	A9HKS332	2600	-	-
32A 5P PK P&S	4	A9HKS532	3085	-	-
63A 5P PK P&S	4	A9HKS563	6230	-	-

*upto 32A socket only

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

☑ NORMAL STOCK ITEMS

W.E.F. June 01, 2017

Acti 9Advanced Communication
Technology that Inspires...**Distribution Boards - Accessories****Locks for Acti 9 DBs**

Key Lock

Description	Reference	Unit MRP
Rotary lock	A9HRL801	420
Key Lock	A9HRL802	500

Accessories for Distribution Boards

Description	Reference	Unit MRP
Busbars		
Fork Busbar 1P 12MOD. 63A	R9XFH112	540
Fork Busbar 1P 57MOD. 63A	R9XFH157	1235
Fork Busbar 2P 12MOD. 63A	R9XFH212	636
Fork Busbar 2P 57MOD. 63A	R9XFH257	2365
Fork Busbar 3P 12MOD. 63A	R9XFH312	950
Fork Busbar 3P 57MOD. 63A	R9XFH357	5175
Fork Busbar 4P 12MOD. 63A	R9XFH412	1235
Fork Busbar 4P 57MOD. 63A	R9XFH457	5425
Busbar Accessories		
Set of 10 End Caps 1P	R9XE110	466
Set of 10 End Caps 2P	R9XE210	466
Set of 10 End Caps 3P	R9XE310	566
Set of 10 End Caps 4P	R9XE410	586
Set of 4 Connector Fork 63A	R9XFC04	450
Set of 20 Tooth Caps	R9XT20	724
Blanking Plate	13229B	26

Note: Blanking Plate MOQ = 10, All other MOQ = 1

Customized Distribution Boards to Suit Your Need - Available on Request*

- TV/Telephone DBs
- Pre-Wired DBs
- 8 Segment DBs
- Acrylic Door DBs
- IP54/55 DBs
- DBs with Phase Indication Lamps

*Please contact nearest Schneider Electric Sales Office for Drawings, Reference and Prices

Please contact Customer Care Center for Stockable and Non stockable status of references.

 NORMAL STOCK ITEMS

W.E.F. June 01, 2017

NeoBreak Distribution Boards

- Zero Error Installation
- IP 43 for Double Door, IP 30 for Single Door
- Independent intermittent shield

Metal Enclosure

Description	Total Modules I/C + O/G	Reference	Unit MRP ₹
1 way	1	NBKPM1	416
2 way	2	NBKPM2	416
3 way	3	NBKPM3	470
4 way	4	NBKPM4	470

SPN DBs



Description	Total Modules I/C + O/G	Door Type	Reference	Unit MRP ₹
SPN 4 way	4	Double door	NBKRENSNDD04	1415
SPN 6 way	6	Double door	NBKRENSNDD06	1570
SPN 8 way	8	Double door	NBKRENSNDD08	1695
SPN 12 way	12	Double door	NBKRENSNDD12	2060
SPN 16 way	16	Double door	NBKRENSNDD16	2805
SPN 4 way	4	Single door	NBKRENSNSD04	916
SPN 6 way	6	Single door	NBKRENSNSD06	1130
SPN 8 way	8	Single door	NBKRENSNSD08	1220
SPN 12 way	12	Single door	NBKRENSNSD12	1440
SPN 16 way	16	Single door	NBKRENSNSD16	1795

TPN DBs



Description	Total Modules I/C + O/G	door Type	Reference	Unit MRP ₹
TPN 4 way	4+12	Double door	NBKRENTHDD04	3435
TPN 6 way	4+18	Double door	NBKRENTHDD06	4320
TPN 8 way	4+24	Double door	NBKRENTHDD08	5395
TPN 12 way	4+36	Double door	NBKRENTHDD12	8180
TPN 4 way	4+12	Single door	NBKRENTHSD04	2625
TPN 6 way	4+18	Single door	NBKRENTHSD06	3340
TPN 8 way	4+24	Single door	NBKRENTHSD08	3995
TPN 12 way	4+36	Single door	NBKRENTHSD12	5785

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

NeoBreak Distribution Boards

VTPN DBs for Modular Incomer



Description	Total Modules I/C + O/G	Door Type	Reference	Unit MRP ₹
VTPN 4 way	8+12	Double door	NBKRENTVDD04	8870
VTPN 8 way	8+24	Double door	NBKRENTVDD08	11110
VTPN 12 way	8+36	Double door	NBKRENTVDD12	14900
VTPN 4 way	8+12	Single door	NBKRENTVSD04	6755
VTPN 8 way	8+24	Single door	NBKRENTVSD08	9275
VTPN 12 way	8+36	Single door	NBKRENTVSD12	12300

VTPN DBs for MCCB Incomer (Suitable for 3P /4P 100A Easypact EZC MCCB)

Description	Total Modules I/C + O/G	Door Type	Reference	Unit MRP ₹
VTPN 4 way	MCCB +12	Double door	NBKRENEZVDD04	10090
VTPN 8 way	MCCB +24	Double door	NBKRENEZVDD08	12230
VTPN 12 way	MCCB +36	Double door	NBKRENEZVDD12	16075

Metal Clad P&S Units



Description	Total Modules I/C + O/G	Reference	Unit MRP ₹
10A SP Plug & Socket	1	NBKRENPS10 <input checked="" type="checkbox"/>	1095
20A SP plug & Socket	1	NBKRENPS20 <input checked="" type="checkbox"/>	1350
20A SPN Plug & Socket	2	NBKRENPSN20 <input checked="" type="checkbox"/>	1410
20A TP Plug & Socket	3	NBKRENPT20 <input checked="" type="checkbox"/>	2695
30A TP Plug & Socket	3	NBKRENPT30 <input checked="" type="checkbox"/>	3195

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

Kaedra Enclosures Weather Proof

Kaedra enclosures for PratiKa industrial sockets are part of a complete system of Watertight enclosures from 16A to 125A providing solutions for protection, control and electrical distribution for tertiary and industrial applications



- Degree of protection - IP65
- Impact strength - IK09
- Resistant to chemical and atmospheric agents, UVs etc.
- Self extinguishing class 2 insulating material
- Flame and abnormal heat resistance: 650°C
- Reversible front face for opening of door to left/right
- Combining of enclosures horizontally/vertically while still maintaining IP
- DIN channel can be positioned in 2 depths & 2 heights for cabling purpose

Mini Enclosures for modular devices



Description	Reference	Unit LP
4 module	13441 <input checked="" type="checkbox"/>	2240
6 module	13442	2550
8 module	13443	3005
12 module	13444	4830

Enclosures for modular devices (with terminal blocks)



Description	Reference	Unit LP
1 row 12 module	13431	5330
1 row 18 module	13432	7025
2 row 24 module	13433	7980
2 row 36 module	13434	10100
3 row 36 module	13435	10535
4 row 72 module	13437	20110

Mini Enclosure (suitable to mount modular devices and PratiKa 16A socket)



Description	Reference	Unit LP
4 module 1 vertical opening	13175 <input checked="" type="checkbox"/>	1065
4 module 2 horizontal opening	13176	1315
4 module 3 horizontal opening	13177	1655

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

Kaedra Enclosures Weather Proof

Enclosure (suitable to mount modular devices and PratiKa 16A / 32A sockets)



Description	Reference	Unit LP <input type="checkbox"/>
5 module 2 opening	13178 <input checked="" type="checkbox"/>	2570
8 module 4 horizontal opening	13179	3510
13 module 3 opening	13180	4640
13 module 6 opening	13181	5100
19 module 8 opening	13182	6580

Functional Plaques



Description	Reference	Unit LP <input type="checkbox"/>
Blank - marked for 1 socket 50x50	13135	326
Blank - marked for 1 socket 65x65 or 75x75	13137	330
Intermediate with 65x85 opening	13136	400
Intermediate with one opening for 65x85 & 90x100	13142	666

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

PratiKa

Plugs and Sockets - IP44 / IP67

Wander Plugs



- Conforms to IEC 60309-1 & IEC 60309-2
- PK PratiKa Screw Connect: same orientation of clamp's screws
- External impact strength; IK08
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP
PratiKa Screw				
IP44				
16	200...250	2P + E	PKE16M423 <input checked="" type="checkbox"/>	386
	380...415	3P + E	PKE16M434 <input checked="" type="checkbox"/>	490
		3P + N + E	PKE16M435 <input checked="" type="checkbox"/>	510
32	200...250	2P + E	PKE32M423 <input checked="" type="checkbox"/>	610
	380...415	3P + E	PKE32M434 <input checked="" type="checkbox"/>	706
		3P + N + E	PKE32M435 <input checked="" type="checkbox"/>	710
IP67				
16	200...250	2P + E	PKE16M723 <input checked="" type="checkbox"/>	846
	380...415	3P + E	PKE16M734 <input checked="" type="checkbox"/>	956
		3P + N + E	PKE16M735 <input checked="" type="checkbox"/>	1020
32	200...250	2P + E	PKE32M723 <input checked="" type="checkbox"/>	1200
	380...415	3P + E	PKE32M734 <input checked="" type="checkbox"/>	1290
		3P + N + E	PKE32M735 <input checked="" type="checkbox"/>	1300
PK (63A & 125A available in IP67 only)				
63	200...250	2P + E	81378	3400
	380...415	3P + E	81382 <input checked="" type="checkbox"/>	3240
		3P + N + E	81383 <input checked="" type="checkbox"/>	3245
125	200...250	2P + E	81390	8675
	380...415	3P + E	81394	9910
		3P + N + E	81395	9910

Small Wall Mounted Sockets



- Conforms to IEC 60309-1 & IEC 60309-2
- External impact strength: IK08
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP
IP44				
16	200...250	2P + E	PKF16W423	680
	380...415	3P + E	PKF16W434	786
		3P + N + E	PKF16W435	860
32	200...250	2P + E	PKF32W423	886
	380...415	3P + E	PKF32W434	1065
		3P + N + E	PKF32W435	1120
IP67				
16	200...250	2P + E	PKF16W723	1080
	380...415	3P + E	PKF16W734	1350
		3P + N + E	PKF16W735	1400
32	200...250	2P + E	PKF32W723	1345
	380...415	3P + E	PKF32W734	1965
		3P + N + E	PKF32W735	2610

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

Wall Mounted Sockets



- Conforms to IEC 60309 -1 & IEC 60309-2
- Rated operational voltage upto 415V
- Rated operational current upto 125A
- External impact strength: IK08
- Glow wire test: 850°C
- Available only in IP67

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP
63	200...250	2P + E	81178	4185
	380...415	3P + E	81182	4305
		3P + N + E	81183	4370
125	200...250	2P + E	81190	14955
	380...415	3P + E	81194	15090
		3P + N + E	81195	15170

Wander Sockets



- PK PratiKa Screw: same orientation of clamp's screws.
- PK PratiKa : 16A & 32A; IP44 & IP67
- External impact strength; IK08
- Glow wire test: 850 °C
- Conforms to IEC 60309 -1 & IEC 60309-2

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP
PratiKa Screw				
IP44				
16	200...250	2P + E	PKF16M423 <input checked="" type="checkbox"/>	536
	380...415	3P + E	PKF16M434	620
		3P + N + E	PKF16M435	676
32	200...250	2P + E	PKF32M423 <input checked="" type="checkbox"/>	736
	380...415	3P + E	PKF32M434	896
		3P + N + E	PKF32M435 <input checked="" type="checkbox"/>	900
IP67				
16	200...250	2P + E	PKF16M723	990
	380...415	3P + E	PKF16M734	1245
		3P + N + E	PKF16M735	1300
32	200...250	2P + E	PKF32M723	1365
	380...415	3P + E	PKF32M734	1510
		3P + N + E	PKF32M735	1525
PK (63A & 125A available in IP67 only)				
63	200...250	2P + E	81478	3700
	380...415	3P + E	81482	3735
		3P + N + E	81483	3790
125	200...250	2P + E	81490	11660
	380...415	3P + E	81494	11680
		3P + N + E	81495	11910

Also Available on Request:

- Patented FAST connect Plugs & Sockets - innovative cabling system that enables connection without stripping the conductor and with absolutely no screws required
- Extra Low Voltage Plugs & Sockets down to 50V

Please contact nearest Schneider Electric Sales Office or Customer Care for Reference and Prices

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017



Plugs and Sockets - IP44 / IP67

Panel Mounted Sockets - Angled



- PK PratiKa Screw: same orientation of clamp's screws
- External impact strength; IK08
- Glow wire test: 850°C
- Conforms to IEC 60309 -1 & IEC309-2

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP
PratiKa Screw				
IP44				
16	200...250	2P + E	PKF16F423 <input checked="" type="checkbox"/>	416
	380...415	3P + E	PKF16F434	620
		3P + N + E	PKF16F435 <input checked="" type="checkbox"/>	660
32	200...250	2P + E	PKF32F423 <input checked="" type="checkbox"/>	736
	380...415	3P + E	PKF32F434	856
		3P + N + E	PKF32F435 <input checked="" type="checkbox"/>	870
IP67				
16	200...250	2P + E	PKF16F723 <input checked="" type="checkbox"/>	780
	380...415	3P + E	PKF16F734	890
		3P + N + E	PKF16F735	900
32	200...250	2P + E	PKF32F723	1015
	380...415	3P + E	PKF32F734	1190
		3P + N + E	PKF32F735 <input checked="" type="checkbox"/>	1210
PK (63A & 125A available in IP67 only)				
63	200...250	2P + E	81278	3340
	380...415	3P + E	81282 <input checked="" type="checkbox"/>	3345
		3P + N + E	81283 <input checked="" type="checkbox"/>	3410
125	200...250	2P + E	81290	10985
	380...415	3P + E	81294	11270
		3P + N + E	81295	11325

Panel Mounted Sockets - Straight



- PK PratiKa Screw: same orientation of clamp's screws
- External impact strength; IK08
- Glow wire test: 850°C
- Conforms to IEC 60309 -1 & IEC309-2

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP
PratiKa Screw				
IP44				
16	200...250	2P + E	PKF16G423	470
	380...415	3P + E	PKF16G434	676
		3P + N + E	PKF16G435	706
32	200...250	2P + E	PKF32G423	746
	380...415	3P + E	PKF32G434	860
		3P + N + E	PKF32G435	930
IP67				
16	200...250	2P + E	PKF16G723 <input checked="" type="checkbox"/>	786
	380...415	3P + E	PKF16G734	890
		3P + N + E	PKF16G735	900
32	200...250	2P + E	PKF32G723	1000
	380...415	3P + E	PKF32G734	1125
		3P + N + E	PKF32G735	1170
PK (63A & 125A available in IP67 only)				
63	200...250	2P + E	81678	3325
	380...415	3P + E	81682	3380
		3P + N + E	81683	3380
125	200...250	2P + E	81690	10985
	380...415	3P + E	81694	11270
		3P + N + E	81695	11325

Note: For all above Reference MOQ = 1
Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

Sockets with Interlock Switches - for guaranteed safety of operation

- Allows closure of main switch only when the plug is fully inserted in socket - when complete mechanical & electrical connection has occurred
- Plug removal is possible only when the switch is in "off" position

Wall Mounted Sockets with Interlock Switch Unika (w/o protection)

- Switch designed for use in AC 22A class applications
- Conforms to IEC 60309 -1 & IEC 60309-2
- Rated operational voltage upto 415V
- Rated operational current upto 32A
- External impact strength: IK08
- Available in IP44 / IP65 versions
- Glow wire test: 750°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP ₹
IP44				
16	200...250	2P + E	83031	5645
	380...415	3P + E	83035	7815
32	380...415	3P + N + E	83036	7970
		2P + E	83042	7330
	200...250	3P + E	83046	8545
		3P + N + E	83047	8635
IP65				
16	200...250	2P + E	83081	5840
	380...415	3P + E	83085	8045
32	380...415	3P + N + E	83086	8210
		2P + E	83092	7655
	200...250	3P + E	83096	9195
		3P + N + E	83097	9195

Socket with Interlock Switch & DIN Rail Isoblock (4.5 modules)

- Switch designed for use in AC- 22A class applications
- Conforms to IEC 60309 -1 & IEC 60309-2
- Provision to DIN mount 4.5 module device
- External impact strength: IK10
- Available in IP65 version
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP ₹
16	200...250	2P + E	82754	7000
	380...415	3P + E	82758	8525
		3P + N + E	82759	8810
32	200...250	2P + E	83791	8285
	380...415	3P + E	83795	9810
		3P + N + E	83796	9875

Socket with Interlock Switch & DIN Rail Isoblock (6 modules)

- Switch designed for use in AC- 22A class applications
- Conforms to IEC 60309 -1 & IEC 60309-2
- Provision to DIN mount 6 module device
- External impact strength: IK10
- Available in IP65 version
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP ₹
32	200...250	2P + E	82766	10935
	380...415	3P + E	82770	12820
		3P + N + E	82771	13210
63	380...415	3P + E	82782	14735
		3P + N + E	82783	14780

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

☑ NORMAL STOCK ITEMS

W.E.F. June 01, 2017

ELECTRA Metal Clad Plugs & Sockets are specially designed incorporating the latest safety, quality and user friendly features.

Construction

- The casting is made from non-corroding die-cast aluminum alloy combining exceptional compactness with high strength
- The design/construction eliminates the possibility of mismatch in fitting of plugs in corresponding sockets
- The floating contacts in the sockets are self aligning and facilitates smooth plugging in without undue pressure (These can be easily removed for wiring)
- A provision for pilot pin facilitates mechanical interlocking in case of 63 Amp ratings

Human Safety

Specially designed shroud to avoid accidental finger contact with plug-pins while inserting/removing the plug

Similarly, the contact tubes in sockets are deeply recessed to avoid human contact

- The earthing pins ensure that earth connection is made first and broken last, being longer than conducting pins
- The visible earth terminals facilitate easy checking of earth connection
- The cable grip to the plug is made very strong by providing a compression gland and by protecting it at the point of entry by a strong rubber guard

Applications

Industrial, Commercial & Domestic portable equipments like hand/Power tools, industrial ovens, Welding sets, Mobile generators, Furnaces, Ships, Office Machines, Refrigerators, Coolers, Air-Conditioners, Overhead cranes, Chilling cabinets, Tile polishers and Sewing Machines

Plug



Rating (A)	Poles Description	Voltage (V)	MOQ	Reference	Unit MRP [₹]
10	2P	250	30	AP10 <input checked="" type="checkbox"/>	186
20	2P	250	30	AP20 <input checked="" type="checkbox"/>	196
20	3P	440	30	BP20 <input checked="" type="checkbox"/>	258
30	3P	440	20	BP30 <input checked="" type="checkbox"/>	472
63	3P+N+E	440	4	CP63 <input checked="" type="checkbox"/>	2140

Socket



Rating (A)	Poles Description	Voltage (V)	MOQ	Reference	Unit MRP [₹]
10	2P	250	30	AS10 <input checked="" type="checkbox"/>	196
20	2P	250	30	AS20 <input checked="" type="checkbox"/>	228
20	3P	440	30	BS20 <input checked="" type="checkbox"/>	290
30	3P	440	20	BS30 <input checked="" type="checkbox"/>	500
63	3P+N+E	440	4	CS63 <input checked="" type="checkbox"/>	2265

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

56 Series

Plugs and Sockets - IP56 / IP66

Complete range of switches & sockets suitable for both indoor & outdoor applications like kitchens , swimming pools landscape gardens , exterior walls and other environmentally challenged locations



56SW110LE-GY

Description	IP Rating	Reference	Unit LP
Surface Switches			
Single Pole Switches Less Enclosure			
1 Pole 250V 10A	IP66	56SW110LE-GY	2350
1 Pole 250V 16A	IP66	56SW116LE-GY	2200
1 Pole 250V 20A	IP66	56SW120LE-GY	3335
1 Pole 250V 32A	IP66	56SW132LE-GY	3940
Double Pole Switches Less Enclosure			
2 Pole 500V 16A	IP66	56SW216LE-GY	3810
2 Pole 500V 20A	IP66	56SW220LE-GY	3810
2 Pole 500V 32A	IP66	56SW232LE-GY	4425
2 Pole 500V 50A	IP66	56SW250LE-GY	4715
2 Pole 500V 63A	IP66	56SW263LE-GY	5185
Triple Pole Switches Less Enclosure			
3 Pole 500V 10A	IP66	56SW310LE-GY	3520
3 Pole 500V 16A	IP66	56SW316LE-GY	3675
3 Pole 500V 20A	IP66	56SW320LE-GY	3865
3 Pole 500V 32A	IP66	56SW332LE-GY	4510
3 Pole 500V 50A	IP66	56SW350LE-GY	5200
3 Pole 500V 63A	IP66	56SW363LE-GY	6040
Four Pole Switches Less Enclosure			
4 Pole 500V 20A	IP66	56SW420LE-GY	5105



66CV563-RG

Description	IP Rating	Reference	Unit LP
IP66 Industrial Combination Switch Sockets with Enclosure			
500V, 63A with 4 pole switch and 63A 5 Pin Socket	IP66	66CV563-RG	68475
500V, 63A with 4 pole switch and 63A 7 Pin Socket	IP66	66CV763-RG	70400
Plug Top 5 Pin 500V 63A	IP66	66P563-EO	20555
Plug Top 5 Pin 500V 63A	IP66	66P763-EO	22990

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

56 Series

Plugs and Sockets - IP56 / IP66



56SO532LE-GY



56SO320LE-RO

Description	IP Rating	Reference	Unit LP [₹]
Surface Socket Outlets			
3 Pin Sockets Less Enclosure			
3 Pin 250V 16A Indian Standard	IP66	56SO316RP-LE-GY-EX	2115
3 Pin 250V 20A Round Pin	IP66	56SO320LE-GY	3220
3 Pin 250V 32A Round Pin	IP66	56SO332LE-GY	3555
4 Pin Sockets Less Enclosure			
4 Pin 500V 20A Round Pin	IP66	56SO420LE-GY	4765
4 Pin 500V 32A Round Pin	IP66	56SO432LE-GY	5695
4 Pin 500V 40A Round Pin	IP66	56SO440LE-GY	6620
4 Pin 500V 50A Round Pin	IP66	56SO450LE-GY	8770
5 Pin Sockets Less Enclosure			
5 Pin 500V 10A Round Pin	IP66	56SO510LE-GY	5150
5 Pin 500V 20A Round Pin	IP66	56SO520LE-GY	5150
5 Pin 500V 32A Round Pin	IP66	56SO532LE-GY	6115
5 Pin 500V 40A Round Pin	IP66	56SO540LE-GY	8820
5 Pin 500V 50A Round Pin	IP66	56SO550LE-GY	9060



56PA420-EO

Description	IP Rating	Reference	Unit LP [₹]
Plugs			
3 Pin Angle Plugs			
3 Pin 250V 16A Indian Standard	IP66	56PA316RP-GY-EX	1670
3 Pin 250V 20A Round Pin	IP66	56PA320-EO	3335
3 Pin 250V 32A Round Pin	IP66	56PA332-EO	3815
4 Pin Angle Plugs			
4 Pin 500V 20A Round Pin	IP66	56PA420-EO	4065
4 Pin 500V 32A Round Pin	IP66	56PA432-EO	4230
4 Pin 500V 40A Round Pin	IP66	56PA440-EO	4975
4 Pin 500V 50A Round Pin	IP66	56PA450-EO	5025
5 Pin Angle Plugs			
5 Pin 500V 10A Round Pin	IP66	56PA510-EO	3995
5 Pin 500V 20A Round Pin	IP66	56PA520-EO	3995
5 Pin 500V 32A Round Pin	IP66	56PA532-EO	4615
5 Pin 500V 40A Round Pin	IP66	56PA540-EO	4885
5 Pin 500V 50A Round Pin	IP66	56PA550-EO	5000
Combination Switch Socket Outlet			
IP66 Interlocked Switch Socket with Enclosure			
4 Pin 500V 20A Round Pin	IP66	56CVI420-GY	12350
4 Pin 500V 32A Round Pin	IP66	56CVI432-GY	13235
5 Pin 500V 20A Round Pin	IP66	56CVI520-GY	15090
5 Pin 500V 32A Round Pin	IP66	56CVI532-GY	15230
5 Pin 500V 40A Round Pin	IP66	56CVI540-GY	16545

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. June 01, 2017

56 Series

Plugs and Sockets - IP56 / IP66



56DB2-GY



56DB4-GY

Description	IP Rating	Reference	Unit LP [₹]
Adaptable Enclosures with Gear Tray			
2 Gangpoints, 198X101X140mm	IP66	56DB2-GY	4165
3 Gangpoints, 294X101X140mm	IP66	56DB3-GY	5545
4 Gangpoints, 198X198X140mm	IP66	56DB4-GY	6095
6 Gangpoints, 294X198X140mm	IP66	56DB6-GY	9165
9 Gangpoints, 294X294X180mm	IP66	56DB9-GY	13525
Junction Boxes			
1 Gangpoint, 107X101X90mm	IP66	56JB1-GY	1840
2 Gangpoints, 204X101X90mm	IP66	56JB2-GY	3050
3 Gangpoints, 300X101X90mm	IP66	56JB3-GY	4570
4 Gangpoints, 204X198X90mm	IP66	56JB4-GY	6140

Description	Module Width	Reference	Unit LP [₹]
Switchgear Cover Assembly			
For 1,2,3 Pole MCB with 4 Pole RCD (max. 4M Width)	4	56CB4N-GY	3620

Description	No. of Gangs	Reference	Unit LP [₹]
Flush Surrounds			
Flush Surround	1	56FA1-GY	1235
Flush Surround	2	56FA2-GY	1785
Flush Surround	3	56FA3-GY	2810
Flush Surround	4	56FA4-GY	2810
Mounting Enclosures (Back Boxes)			
101X101X63mm	1	56E1-GY-EX	828
198X101X63mm	2	56E2-GY	1935
294X101X63mm	3	56E3-GY	3160
198X198X63mm	4	56E4-GY	4065
294X198X63mm	6	56E6-GY	6500
391X198X63mm	8	56E8-GY	8535
294X294X63mm	9	56E9-GY	9400
391X391X63mm	16	56E16-GY	15315

Please contact Customer Care Center for Stockable and Non stockable status of references.

 NORMAL STOCK ITEMS

W.E.F. June 01, 2017

SWITCH TO STYLE

Perfect solutions for the perfect you

ULTi



NEO



ZENcelo



Opale



LIVIA



LIVIA - Switch to the extra-ordinary



- **Sleek Design** - 2.7mm thin plate with curved body to minimize dust accumulation
- **Stylish Looks** - Soft white texture with glossy finish
- **Robust & Strong** - Innovative honeycomb designed grid plate for extra rigidity
- **Reliable** - High grade heat-resistant polycarbonate and laser marked wiring diagrams
- **Easy to Install** - Snap-In / Snap-Out front loading modules and Bigger terminal holes
- **Green & Eco Friendly** - RoHS compliant range



Description	Reference for White	Unit MRP [₹]	Reference for Pebble Grey	Unit MRP [₹]
Switches				
10AX 1 way switch	P1001	110	P1001_DG	130
10AX 1 way switch with Indicator lamp	P1081	180	P1081_DG	206
10AX 2 way switch	P1002	146	P1002_DG	172
16AX 1 way switch	P1101	160	P1101_DG	188
16AX 1 way switch with Indicator lamp	P1181	220	P1181_DG	256
16AX 1 way switch (2M)	P1121	226	P1121_DG	264
20A DP switch with Indicator lamp	P1120	356	P1120_DG	416
32A DP switch with Indicator lamp	P1132	534	P1132_DG	628
Bell Push				
10A Bell Push switch	P1005	162	P1005_DG	188
10A Bell Push switch (2M)	P1025	210	P1025_DG	246
10A bell push switch with Indicator	P1085	190	P1085_DG	222
10A bell push switch with Indicator (2M)	P1086	246	P1086_DG	288
Sockets				
10A, 2/3pin Socket Outlet with Shutter	P2005	178	P2005_DG	208
10A/16A 3-pin Socket Outlet with Shutter	P2106	268	P2106_DG	314
10A/25A 3 Pin Socket Outlet with Shutter	P2207	362	P2207_DG	424
13A Multi Pin Socket Outlet with Shutter	P2010	290	P2010_DG	348
Fan Regulators & Dimmers				
Step type fan regulator (1M)	P3100	498	P3100_DG	584
Step type fan regulator (2M)	P3200	600	P3200_DG	706
Dimmer 400W (1M)	P3004	862	P3004_DG	1034
Dimmer 1000W (2M)	P3012	1125	P3012_DG	1320
Accessories				
RJ 11 Telephone outlet with shutter	P4011	144	P4011_DG	172
RJ 45 Cat 5e Data outlet with shutter	P4045	494	P4045_DG	578
RJ 45 Cat6 Data outlet with shutter	P4046	552	P4046_DG	664
TV socket	P4500	138	P4500_DG	164
Blank off unit (1M)	P0001	38	P0001_DG	44
Cover Plates				
1-2 M Grid & 1 M Cover Frame	P0701	96	P0701_DG	110
1-2 M Grid & 2 M Cover Frame	P0702	96	P0702_DG	114
3 M Grid & 3 M Cover Frame	P0703	122	P0703_DG	142
4 M Grid & 4 M Cover Frame	P0704	142	P0704_DG	166
6 M Grid & 6 M Cover Frame	P0706	180	P0706_DG	218
8 M Grid & 8 M Cover Frame - Horizontal	P0708	236	P0708_DG	286
8 M Grid & 8 M Cover Frame - Square	P0709	274	P0709_DG	322
12 M Grid & 12 M Cover Frame	P0712	332	P0712_DG	390
18 M Grid & 18 M Cover Frame	P0718	478	P0718_DG	562

Opale - Switches with Satin Finish



- **Patented Smooth Satin Finish** - Scratch Resistant, Easy to Clean & Prevents light reflection off surface
- **Safe to Use** - High grade flame retardant polycarbonate material & Child Proof sockets with unique shutter design
- **Hassle Free Operation** - 'Soft sound' switches with Gold plated Data Socket contacts for better connection
- **Easy to Install** - Snap-In / Snap-Out front loading modules and terminals with indented screws
- **Green & Eco Friendly** - RoHS compliant range



X1001WH

X1286WH

X1186WH

X1005WH

X1085WH

X2005WH

X2106WH

X2010WH

X3200WH

X3104WH

X4010WH

X4500WH

X5001

X5002

Description	Reference for White	Unit MRP [₹]	Reference for Coke Grey	Unit MRP [₹]
Switches				
6A 1 way switch	X1001WH	134	AAKY1001	166
6A 1 way switch with Indicator lamp	X1081WH	194	AAKY1081	230
6A 2 way switch	X1002WH	170	AAKY1002	206
16A 1 way switch	X1101WH	198	AAKY1101	244
16A 1 way switch with Indicator lamp	X1181WH	274	AAKY1181	322
16A 2 way switch	X1102WH	264	AAKY1102	312
6A 1 way switch (2M)	X1021WH	216	AAKY1021	258
16A 1 way switch (2M)	X1121WH	278	AAKY1121	332
6A 1 way switch with Indicator (2M)	X1028WH	262	AAKY1028	314
16A 1 way switch with Indicator (2M)	X1128WH	320	AAKY1128	382
20A DP switch with Indicator (2M)	X1286WH	464	AAKY1286	540
32A DP switch (2M)	AAKX1232	676	-	-
Motor Starter Switch				
25A Motor Starter switch	X1186WH	1180	AAKY1186	1420
Bell Push				
6A Bell Push	X1005WH	194	AAKY1005	232
6A Bell Push (2M)	X1025WH	272	AAKY1025	328
6A Bell Push with Indicator	X1085WH	256	AAKY1085	306
6A Bell Push with Indicator (2M)	X1086WH	292	AAKY1086	348
Sockets				
6A 2/3 Pin Socket Outlet with Shutter	X2005WH	208	AAKY2005	248
6A "Uni Socket" Outlet with Shutter	X2007WH	260	AAKY2007	298
6A/16A 3-Pin Socket Outlet with Shutter	X2106WH	320	AAKY2106	376
13A Multi Pin Socket Outlet with Shutter	X2010WH	314	AAKY2010	378
16A 3-Pin Socket Outlet with Shutter	X2103WH	354	AAKY2103	426
13A BS flat Pin Socket Outlet with Shutter	X2403WH	444	AAKY2403	532
20A 3 Pin Socket Outlet with Shutter	X2206WH	398	AAKY2206	478
25A 3 Pin Socket Outlet with Shutter	X2207WH	430	AAKY2207	514
Fan Regulators & Dimmers				
Step type fan regulator (2M)	X3200WH	742	AAKY3200	888
Dimmer 400W (1M)	X3104WH	666	AAKY3104	798
Dimmer 400W (2M)	X3004WH	1032	AAKY3004	1240
Dimmer 1200W	X3012WH	1330	AAKY3012	1595
Accessories				
RJ11 Telephone outlet (no shutter)	X4010WH	170	AAKY4010	206
RJ11 Telephone outlet with shutter	X4011WH	172	AAKY4011	206
Twin RJ11 Telephone outlets (no shutter) (1M)	X4020WH	258	AAKY4020	314
RJ45 Data Outlet with shutter	X4045WH	606	AAKY4045	714
TV Socket	X4500WH	160	AAKY4500	198
RJ45 Cover for Key Stone Type	X4050WH	196	AAKY4050	236
Gripped Cord Outlet	X4550WH	176	AAKY4550	210
Buzzer	X3300WH	726	AAKY3300	802
Blank off unit (1M)	X0001WH	42	AAKY0001	58
Neon Phase Indicator (Red)	X5001	274	-	-
Neon Phase Indicator (Green)	X5002	274	-	-
Neon Phase Indicator (Yellow)	X5003	274	-	-

Opale - Switches with Satin Finish



AAKX6002 + AAKX6004 + X0702



AAKX6006 + X0703

Description	Reference	Unit MRP [₹]
Hotel Series*		
DND Panel	AAKX6001	430
DND Switch	AAKX6002	336
MMR Panel	AAKX6003	406
MMR Switch	AAKX6004	336
Key Tag Switch (Mechanical Type 20 A)	AAKX6005	870
Shaver Socket	AAKX6006	3120

*Available in white colour only



X0733WH




AAKX0744




AAKX0754

Description	Reference for White	Unit MRP [₹]	Reference for Coke Grey	Unit MRP [₹]	Reference for Matt Silver	Unit MRP [₹]	Reference for Matt Gold	Unit MRP [₹]
Cover Plates								
1-2 M Grid & 1 M Cover Frame	X0701	110	AAKY0801	134	AAKX0741	276	AAKX0751	276
1-2 M Grid & 2 M Cover Frame	X0702	116	AAKY0802	140	AAKX0742	298	AAKX0752	298
3 M Grid & 3 M Cover Frame	X0703	138	AAKY0803	168	AAKX0743	356	AAKX0753	356
3 M Universal Grid & 3 M Cover Frame	X0733WH	184	AAKY0833	218	AAKX0744	356	AAKX0754	356
4 M Grid & 4 M Cover Frame	X0704	162	AAKY0804	200	AAKX0745	424	AAKX0755	424
6 M Grid & 6 M Cover Frame	X0706	226	AAKY0806	270	AAKX0746	524	AAKX0756	524
8 M Grid & 8 M Cover Frame - Horizontal	X0708	296	AAKY0808	352	AAKX0747	686	AAKX0757	686
8 M Grid & 8 M Cover Frame - Square	X0709	350	AAKY0809	418	AAKX0748	686	AAKX0758	686
12 M Grid & 12 M Cover Frame	X0712	410	AAKY0812	492	AAKX0749	936	AAKX0759	936
18 M Grid & 18 M Cover Frame	AAKX0718	536	-	-	-	-	-	-

ZENcelo India - The Revolutionary Full-Flat Switch




- World's First and only **Full-Flat Mechanical Switch**
- **Patented Iso-Motion Technology** - Ensures switch stays in the same position whether On or Off
- **Robust & Strong** - Made of corrosion-resistant, heat-resistant and impact-resistant polycarbonate
- **Safe to Use** - Electric arc encapsulated switches and Data Sockets with patented integrated shutter
- **Designed to Last** - Switches tested to 80,000 times; Sockets tested to 15,000 cycles.
- **Green & Eco Friendly** - RoHS compliant range



Description	Reference for White	Unit MRP [₹]	Reference for Dark Grey	Unit MRP [₹]
Switches				
6A 1 Way switch	IN8401	290	IN8401(BZ)	364
6A 1 Way switch (2M)	IN8421	432	IN8421(BZ)	522
6A 2 Way switch	IN8402	340	IN8402(BZ)	408
6A 1 Way switch with Neon	IN8481	422	IN8481(BZ)	508
16AX~20A 1 Way switch	IN8401/16	410	IN8401/16(BZ)	500
16AX~20A 1 Way switch (2M)	IN8421/16	576	IN8421/16(BZ)	682
16AX~20A 1 Way switch with Neon	IN8481/16	578	IN8481/16(BZ)	686
16AX~20A 1 Way switch with Neon (2M)	IN8482/16	682	IN8482/16(BZ)	802
16AX~20A 2 Way switch	IN8402/16	572	IN8402/16(BZ)	676
16AX~20A 2 Way switch (2M)	IN8422/16	686	IN8422/16(BZ)	806
16AX~20A 1 Way 2G switch (1M)	IN8444/16	664	IN8444/16(BZ)	802
10AX Intermediate switch	IN8430/IM	886	IN8430/IM(BZ)	1046
20A DP Switch with Neon (2M)	IN8486/20	892	IN8486/20(BZ)	1054
32A DP Switch with Neon (2M)	IN8486/32	1402	IN8486/32(BZ)	1666
Motor Starter Switch				
25A Motor Starter switch (2M)	IN8425MS	2275	IN8425MS(BZ)	2415
Bell Push				
6A Bell Push switch	IN8405	386	IN8405(BZ)	466
6A Bell Push switch (2M)	IN8425	564	IN8425(BZ)	666
6A Bell Push switch with Neon	IN8485	502	IN8485(BZ)	592
6A Bell Push switch with Neon (2M)	IN8486	624	IN8486(BZ)	736
Sockets				
2~3 Pin Universal Socket with Shutter	IN8426U	442	IN8426U(BZ)	536
6A/16A 3 Pin Socket with Shutter	IN8426/16	662	IN8426/16(BZ)	812
13A Flat Pin Socket with Shutter	IN84213	908	IN84213(BZ)	1072
International Socket with Shutter	IN84213IS	782	IN84213IS(BZ)	978
Universal 2 Pin Socket with Shutter	IN84226U	466	IN84226U(BZ)	546
20A 3 Pin Socket with Shutter	IN84220	844	IN84220(BZ)	994
25A 3 Pin Socket with Shutter	IN84225	904	IN84225(BZ)	1082
Fan Regulators & Dimmers				
Fan Control (5 Speeds)	IN84SFR	1572	IN84SFR(BZ)	1885
Full Flat 400W Dimmer Module (1 Gang)	IN8404D	1348	IN8404D(BZ)	1596
Accessories				
RJ11 Telephone Outlet with shutter (1 Gang)	IN8431RJS4	440	IN8431RJS4(BZ)	538
RJ45 Cat6 Data Outlet with shutter	IN8431RJ6	1528	IN8431RJ6(BZ)	1880
Data Outlet Wall Plate (for RJ45 key stone jack)	IN8431RJC	420	IN8431RJC(BZ)	494
TV Socket	IN8431TV	320	IN8431TV(BZ)	388
Cord Outlet	IN8445CO	348	IN8445CO(BZ)	414
Foot Lamp with White LED (2M)	IN8490FLW	2975	-	-
Foot Lamp with Yellow LED (2M)	IN8490FLY	2900	-	-
Blank off unit (1M)	IN8430X	98	IN8430X(BZ)	120
Hotel Series				
Do Not Disturb Panel	INH8451	2060	INH8451(BZ)	2435
Make My Room Panel	INH8454	1865	INH8454(BZ)	2205
Do Not Disturb Switch	INH8452	1016	INH8452(BZ)	1202
Do Not Disturb Switch (2M)	INH8453	1036	INH8453(BZ)	1222
Make My Room Switch	INH8455	998	INH8455(BZ)	1176

ZENcelo India - The Revolutionary Full-Flat Switch




IN8403C



IN8406C



IN8402C(BZ)



IN8404C(SZ)



IN84012C(SA)

Description	Reference for White	Unit MRP [₹]	Reference for Dark Grey	Unit MRP [₹]	Reference for Silver Bronze	Unit MRP [₹]	Reference for Satin Silver	Unit MRP [₹]
Cover Plates								
1M Grid & 1M Cover Frame	IN8401C	242	IN8401C(BZ)	288	IN8401C(SZ)	670	IN8401C(SA)	670
2M Grid & 2M Cover Frame	IN8402C	252	IN8402C(BZ)	302	IN8402C(SZ)	662	IN8402C(SA)	662
3M Grid & 3M Cover Frame	IN8403C	298	IN8403C(BZ)	354	IN8403C(SZ)	816	IN8403C(SA)	816
4M Grid & 4M Cover Frame	IN8404C	322	IN8404C(BZ)	418	IN8404C(SZ)	980	IN8404C(SA)	980
6M Grid & 6M Cover Frame	IN8406C	494	IN8406C(BZ)	588	IN8406C(SZ)	1342	IN8406C(SA)	1342
8M Grid & 8M Cover Frame - Horizontal	IN8408HC	586	IN8408HC(BZ)	704	IN8408HC(SZ)	1820	IN8408HC(SA)	1820
8M Grid & 8M Cover Frame - Square	IN8408SC	816	IN8408SC(BZ)	1022	IN8408SC(SZ)	2320	IN8408SC(SA)	2320
9M Grid & 9M Cover Frame	IN8409C	966	IN8409C(BZ)	1204	IN8409C(SZ)	2915	IN8409C(SA)	2915
12M Grid & 12M Cover Frame	IN84012C	1278	IN84012C(BZ)	1572	IN84012C(SZ)	4070	IN84012C(SA)	4070
18M Grid & 18M Cover Frame	IN84018C	1805	IN84018C(BZ)	2120	IN84018C(SZ)	5390	IN84018C(SA)	5390

ZENcelo BS - The Revolutionary Full-Flat Switch



- **British Standard** - Consistent Plate Size across functions
- World's First and only **Full-Flat Mechanical Switch**
- **Patented Iso-Motion Technology** - Ensures switch stays in the same position whether On or Off
- **Robust & Strong** - Made of corrosion-resistant, heat-resistant and impact-resistant polycarbonate
- **Designed to Last** - Switches tested to 80,000 times; Sockets tested to 15,000 cycles.
- **Green & Eco Friendly** - RoHS compliant range



E8432/1>SZ-OS



E8433/1-OS



E8415_10_WE



E8431D20-OS



E431RJS4-OS

Description	Reference For White	Unit MRP [₹]	Reference For Silver Brozne	Unit MRP [₹]
Switches				
16AX/20A 1 Gang 1 Way switch with Ondicator	E8431/1-OS	318	E8431/1>SZ-OS	396
16AX/20A 2 Gang 1 Way switch with Ondicator	E8432/1-OS	492	E8432/1>SZ-OS	616
16AX/20A 3 Gang 1 Way switch with Ondicator	E8433/1-OS	806	E8433/1>SZ-OS	1006
16AX/20A 4 Gang 1 Way switch with Ondicator	E8434/1-OS	1160	E8434/1>SZ-OS	1450
16AX/20A 1 Gang 2 Way switch	E8431/2-OS	340	E8431/2>SZ-OS	424
16AX/20A 2 Gang 2 Way switch	E8432/2-OS	598	E8432/2>SZ-OS	746
16AX/20A 3 Gang 2 Way switch	E8433/2-OS	868	E8433/2>SZ-OS	1090
16AX 1 Gang Intermediate Switch	E8431/I-OS	944	E8431/I>SZ-OS	1185
Double Pole Switches				
20A 1 Gang Double Pole switch with Neon	E8431D20-OS	904	E8431D20>SZ-OS	1185
32A 1 Gang Double Pole switch with Neon	E8431D32-OS	1200	E8431D32>SZ-OS	1575
Bell Push				
10A Full-Flat Bell Switch	E8431BP1-OS	346	E8431BP1>SZ-OS	426
Sockets				
5A 1 Gang 3 Round Pin Switched Socket with Shutter and Ondicator	E8415/5-OS	628	E8415/5>SZ-OS	782
5A 1 Gang 3 Round Pin Switched Socket with Neon and Shutter	E8415/5N-OS	884	E8415/5N>SZ-OS	1110
15A 1 Gang 3 Round Pin Switched Socket with Shutter and Ondicator	E8415/15-OS	742	E8415/15>SZ-OS	928
15A 1 Gang 3 Round Pin Switched Socket with Shutter and Neon	E8415/15N-OS	1090	E8415/15N>SZ-OS	1350
16A 1 Gang International Socket with Shutter	E84426/16IS-OS	790	E84426/16IS>SZ-OS	982
13A 1 Gang Switched Socket with Ondicator	E8415-OS	928	E8415>SZ-OS	1160
13A 1 Gang Switched Socket with Neon	E8415N-OS	782	E8415N>SZ-OS	976
10/16A Switched Socket Outlet -Shuttered	E8415_16_10_WE	826	E8415_16_10_SZ	968
10A 2-3 pin Switched Socket Outlet - Shuttered	E8415_10_WE	658	E8415_10_SZ	820
Fan Regulators & Dimmers				
350VA 50Hz 1 Gang Full-Flat Universal Dimmer with LED	E8431EPD4-OS	2055	E8431EPD4>SZ-OS	2565
Accessories				
1 Gang TV Socket Master	E8431TVM-OS	398	E8431TVM>SZ-OS	496
1 Gang Telephone Socket on Shuttered Wallplate	E8431RJS4-OS	506	E8431RJS4>SZ-OS	634
2 Gang Telephone Socket on Shuttered Wallplate	E8432RJS4-OS	1185	E8432RJS4>SZ-OS	1470
1 Gang Data Outlet Category 5E with Integrated Shutter	E8431RJ/5-OS	790	E8431RJ/5>SZ-OS	982
1 Gang Data Outlet Category 6 with Integrated Shutter	E8431RJ/6-OS	944	E8431RJ/6>SZ-OS	1185
1 Gang Data Outlet Category 5E on Shuttered Wallplate	E8431RJS/5-OS	982	E8431RJS/5>SZ-OS	1235
1 Gang Data Outlet Category 6 on Shuttered Wallplate	E8431RJS/6-OS	1185	E8431RJS/6>SZ-OS	1475
2 Gang Data Outlet Category 5E with Integrated Shutter	E8432RJ/5-OS	1380	E8432RJ/5>SZ-OS	1720
2 Gang Data Outlet Category 6 with Integrated Shutter	E8432RJ/6-OS	1770	E8432RJ/6>SZ-OS	2205
2 Gang Data Outlet Category 5E on Shuttered Wallplate	E8432RJS/5-OS	1380	E8432RJS/5>SZ-OS	1720
2 Gang Data Outlet Category 6 on Shuttered Wallplate	E8432RJS/6-OS	1770	E8432RJS/6>SZ-OS	2205
2 Gang Telephone + Data Outlet Category 5E with Integrated Shutter	E8432TDRJ/5-OS	1185	E8432TDRJ/5>SZ-OS	1475
2 Gang Telephone + Data Outlet Category 5E on Shuttered Wallplate	E8432TDRJS/5-OS	1470	E8432TDRJS/5>SZ-OS	1835
2 Gang Telephone + Data Outlet Category 6 on Shuttered Wallplate	E8432TDRJS/6-OS	1670	E8432TDRJS/6>SZ-OS	2085
TV + Cat 6 shutter outlet	E8432TVRJ6_WE_G1	1470	E8432TVRJ6_SZ_G1	1605
1 Gang Wallplate without Modular Jack	E8431RJ-OS	202	E8431RJ>SZ-OS	250
1 Gang Shuttered Wallplate without Modular Jack	E8431RJS-OS	304	E8431RJS>SZ-OS	372
2 Gang Wallplate without Modular Jack	E8432RJ-OS	340	E8432RJ>SZ-OS	422
2 Gang Shuttered Wallplate without Modular Jack	E8432RJS-OS	358	E8432RJS>SZ-OS	444
25A Connection Unit	E8431TB-OS	790	E8431TB>SZ-OS	982
Blank off unit (1M)	E8430X-OS	210	E8430X>SZ-OS	262

W.E.F. June 01, 2017

ZENcelo BS - The Revolutionary Full-Flat Switch



E8431USB_WE



E8431USB_SZ



E8431USB_SA

Description	Reference For White	Unit MRP [₹]	Reference For Silver Bronze	Unit MRP [₹]	Reference For Satin Silver	Unit MRP [₹]
-------------	---------------------	--------------	-----------------------------	--------------	----------------------------	--------------

USB Chargers NEW

1 Gang 2.1A USB Charger	E8431USB_WE	3280	E8431USB_SZ	3660	E8431USB_SA	3660
-------------------------	-------------	------	-------------	------	-------------	------



E8431EKT-OS



E8432DMS>SZ-OS



E84T727H-OS



E84T727V>SZ-OS

Description	Reference For White	Unit MRP [₹]	Reference For Silver Bronze	Unit MRP [₹]
-------------	---------------------	--------------	-----------------------------	--------------

Hotel Series

Illuminated "Do Not Disturb" & "Please Clean Up" Symbols	E8432DM-OS	2710	E8432DM>SZ-OS	3385
Illuminated "Do not Disturb" Symbol	E8431D-OS	790	E8431D>SZ-OS	982
1 Gang Full-Flat Switch with Illuminated "Do not Disturb" Symbol	E8431DS-OS	424	E8431DS>SZ-OS	530
2 Gang Full-Flat Switch with Illuminated "Do not Disturb" & "Please Clean Up" Symbols	E8432DMS-OS	2985	E8432DMS>SZ-OS	3730
1 Gang Full-Flat Bell Switch with Illuminated "Do Not Disturb" Symbol	E8431BPD-OS	2270	E8431BPD>SZ-OS	2755
1 Gang Full-Flat Bell Switch with Illuminated "Do Not Disturb" & "Please Clean Up" Symbols	E8431BPDM-OS	2895	E8431BPDM>SZ-OS	3620
Electronic Key Card Time Delay Switch	E8431EKT-OS	5795	E8431EKT>SZ-OS	7250
Universal Shaver Unit, Vertical	E84T727V-OS	3275	E84T727V>SZ-OS	4085
Universal Shaver Unit, Horizontal	E84T727H-OS	3275	E84T727H>SZ-OS	4085

NEO - Face the Future



- **Unique** - Horizontal Switches available for Horizontal Decor
- **Stylish** - Ingenious combination of matt and gloss finish along with a fresh look through use of LED technology
- **Convenient** - Switches with soft, luminiscent "locators" to locate the switch in dark
- **Dual Tone Colours** - Standard colours include Grey and White incorporating Blue and White LED respectively



E3033H1EBGS



E3032H1EWWW



E3032H1FWWW



E3032V1EBGS



E3031V1EWWW



E3032V1FWWW

Description	Horizontal Dolly Reference	Unit MRP [₹]	Vertical Dolly Reference	Unit MRP [₹]
Grey Switches with Blue LED Indicator				
10AX 250V 1 Gang 1 Way Switch	E3031H1EBGS	610	E3031V1EBGS	610
10AX 250V 1 Gang 2 Way Switch	E3031H2EBGS	712	E3031V2EBGS	712
10AX 250V 2 Gang 1 Way Switch	E3032H1EBGS	952	E3032V1EBGS	952
10AX 250V 2 Gang 2 Way Switch	E3032H2EBGS	1122	E3032V2EBGS	1122
10AX 250V 3 Gang 1 Way Switch	E3033H1EBGS	1395	E3033V1EBGS	1395
10AX 250V 3 Gang 2 Way Switch	E3033H2EBGS	1645	E3033V2EBGS	1645
10AX 250V 4 Gang 1 Way Switch	E3034H1EBGS	1740	-	-
10AX 250V 4 Gang 2 Way Switch	E3034H2EBGS	2060	-	-
White Switches with White LED Indicator				
10AX 250V 1 Gang 1 Way Switch	E3031H1EWWW	592	E3031V1EWWW	592
10AX 250V 1 Gang 2 Way Switch	E3031H2EWWW	682	E3031V2EWWW	682
10AX 250V 2 Gang 1 Way Switch	E3032H1EWWW	946	E3032V1EWWW	946
10AX 250V 2 Gang 2 Way Switch	E3032H2EWWW	1088	E3032V2EWWW	1100
10AX 250V 3 Gang 1 Way Switch	E3033H1EWWW	1335	E3033V1EWWW	1335
10AX 250V 3 Gang 2 Way Switch	E3033H2EWWW	1550	E3033V2EWWW	1550
10AX 250V 4 Gang 1 Way Switch	E3034H1EWWW	1695	-	-
10AX 250V 4 Gang 2 Way Switch	E3034H2EWWW	2010	-	-
White Switches with White Fluorescent Indicator				
10AX 250V 1 Gang 1 Way Switch	E3031H1FWWW	588	E3031V1FWWW	588
10AX 250V 1 Gang 2 Way Switch	E3031H2FWWW	664	E3031V2FWWW	664
10AX 250V 2 Gang 1 Way Switch	E3032H1FWWW	940	E3032V1FWWW	940
10AX 250V 2 Gang 2 Way Switch	E3032H2FWWW	1096	E3032V2FWWW	1096
10AX 250V 3 Gang 1 Way Switch	E3033H1FWWW	1330	E3033V1FWWW	1330
10AX 250V 3 Gang 2 Way Switch	E3033H2FWWW	1570	E3033V2FWWW	1570
10AX 250V 4 Gang 1 Way Switch	E3034H1FWWW	1720	-	-
10AX 250V 4 Gang 2 Way Switch	E3034H2FWWW	2030	-	-

NEO - Face the Future



E3031VBP>GS-OS



E3031VD20>EWWW-OS



E3426/10IS>GS-OS



EH3015/6>GS-OS



E3031TV>GS-OS



E3031RJ5E>WW-OS



E3031USB_GS



E3031USB_WW



E3032HDM>GS-OS



E3031EKTH>WW-OS

Description	Reference for Grey	Unit MRP [₹]	Reference for White	Unit MRP [₹]
Bell Push				
4A 1 Way Horizontal Bell Push Switch	E3031HBP>GS-OS	1270	E3031HBP>WW-OS	1245
4A 1 Way Vertical Bell Push Switch	E3031VBP>GS-OS	1250	E3031VBP>WW-OS	1230
DP Switches				
1 Gang Horizontal 20A DP Switch with Blue LED for Grey Switch and White LED for White Switch	E3031HD20EBGS	1060	E3031HD20EWWW	1028
1 Gang Vertical 20A DP Switch with Blue LED for Grey Switch and White LED for White Switch	E3031VD20>EBGS-OS	1032	E3031VD20>EWWW-OS	1000
1 Gang 32A DP Rocker Switch with Blue LED for Grey Switch and White LED for White Switch	E3031DR32EBGS	1550	E3031DR32EWWW	1495
Intermediate Switch				
16AX Intermediate Switch with Blue LED for Grey Switch and White LED for White Switch	E3031VIA>EBGS-OS	1675	E3031VIA>EWWW-OS	1610
Socket				
15A 1 Gang Switch Socket Outlet Grey with Blue LED for Grey Socket and White LED for White Socket	E3015/15-EBGS-EX	1815	E3015/15-EWWW-EX	1765
10A International Socket	E3426/10IS>GS-OS	1420	E3426/10IS>WW-OS	1360
6A 1 Gang Switch Socket Outlet	EH3015/6>GS-OS	1048	EH3015/6>WW-OS	1006
6/16A 1 Gang Switch Socket Outlet	EH3015/16/6>GS-OS	1465	EH3015/16/6>WW-OS	1435
Fan Regulators & Dimmers				
1 Gang Fan Control	E3031FRGS	1665	E3031FRWW	1510
1 Gang Dimmer with Blue LED for Grey Dimmer and White LED for White Dimmer	E3031HD>EBGS-OS	10800	E3031HD>EWWW-OS	10700
2 Gang Horizontal Dimmer with Blue LED for Grey Dimmer and White LED for White Dimmer	E3032HD>EBGS-OS	18950	E3032HD>EWWW-OS	18420
Accessories				
1 Gang TV Socket Outlet	E3031TV>GS-OS	946	E3031TV>WW-OS	924
2 Gang TV Socket Outlet	E3032TV>GS-OS	1845	E3032TV>WW-OS	948
4 Pin 1 Gang Telephone Outlet (CAT 3)	E3031RJ>GS-OS	1096	E3031RJ>WW-OS	1040
4 Pin 1 Gang 8 Pin Data Outlet (CAT 5E)	E3031RJ5E>GS-OS	2905	E3031RJ5E>WW-OS	2800
4 Pin 2 Gang Telephone Outlet (CAT 3)	E3032RJ>GS-OS	1960	E3032RJ>WW-OS	1845
4 Pin Telephone Outlet (CAT 3) + 8 Pin Data Outlet (CAT 5E)	E3032TD>GS-OS	3580	E3032TD>WW-OS	3465
1G Keystone Plate Shuttered	E3031RJK>GS-OS	628	E3031RJK>WW-OS	606
2G Keystone Plate Shuttered	E3032RJK>GS-OS	656	E3032RJK>WW-OS	646
1 x 2.1A USB Charger NEW	E3031USB_GS	4440	E3031USB_WW	4250
25A Connection Unit	E3031TB>GS-OS	832	E3031TB>WW-OS	798
1 Gang Blank Plate	E3030X>GS-OS	536	E3030X>WW-OS	512
2 Gang Blank Plate	ET3030X>GS-OS	1196	ET3030X>WW-OS	1156
Hotel Series				
2 Gang "Do Not Disturb" & "Please Clean Up" Combined (Horizontal)	E3032HDM>GS-OS	5530	E3032HDM>WW-OS	5360
1 Gang "Do Not Disturb" & "Please Clean Up" Combined (Vertical)	E3030VDM>GS-OS	5150	E3030VDM>WW-OS	4870
1 Gang Bell Push with "Please Clean Up" Combined (Vertical)	E3031VBPM>GS-OS	4225	E3031VBPM>WW-OS	4070
1 Gang Bell Push with "Do not Disturb" Combined (Vertical)	E3031VBPD>GS-OS	4225	E3031VBPD>WW-OS	4070
1 Gang Bell Push with "Do Not Disturb" & "Please Clean Up" Combined (Vertical)	E3031VBPDM>GS-OS	4225	E3031VBPDM>WW-OS	4070
Electronic Key Card Switch (Horizontal)	E3031EKTH>GS-OS	12410	E3031EKTH>WW-OS	12080
115/240V Shaver Outlet (Vertical)	ET3727V>GS-OS	6080	ET3727V>WW-OS	5960

W.E.F. June 01, 2017

ULTI Impress - The Ultimate Switch



1 Gang Switch with Crystal Glass Plate



2 Gang Switch with Pearl White Plate



4 Gang Switch with Brushed Silver Plate



Bell Push with Champagne Gold Plate



6-16A Switched Socket with Crystal Glass Plate

- **Super Stylish** - Single piece face plate with maximized space for plate along with soft radiant blue/amber backlight for switches
- **Multiple Finish Options** - Crystal Glass, Champagne Gold, Brushed Silver, Pearl White
- **Technological Marvel** - Mechanical switch with touch and feel of electronic switch with patented impress mechanism
- **Strength & Durability** - Ionized metal grid for back housing plate
- **Automation Alignment** - Lighting Control & Automation available in same finish

Description	Colour	Reference	Unit MRP [₹]
Switches			
1 Gang 250V 16AX 1 Way Switch module with Blue LED	Module	U201SPM/1>B00-OS	4225
1 Gang 250V 16AX 2 Way Switch module with Blue LED	Module	U201SPM/2>B00-OS	4575
Cover Plate for 1 Gang Switch	Brushed Silver	UC21SW/P>XBS-OS	1265
	Champagne Gold	UC21SW/P>XCG-OS	1265
	Crystal Glass	UC21SW/P>XGL-OS	5455
	Pearl White	UC21SW/P>XPW-OS	1265
2 Gang 250V 16AX 1 Way Switch module with Blue LED	Module	U202SPM/1>B00-OS	5635
2 Gang 250V 16AX 2 Way Switch module with Blue LED	Module	U202SPM/2>B00-OS	6330
Cover Plate for 2 Gang Switch	Brushed Silver	UC22SW/P>XBS-OS	1805
	Champagne Gold	UC22SW/P>XCG-OS	1805
	Crystal Glass	UC22SW/P>XGL-OS	6245
	Pearl White	UC22SW/P>XPW-OS	1805
4 Gang 250V 16AX, 1 Way Switch module with Blue LED	Module	U204SPM/1>B00-OS	9675
4 Gang 250V 16AX 2 Way Switch module with Blue LED	Module	U204SPM/2>B00-OS	10905
Cover Plate for 4 Gang Switch	Brushed Silver	UC24SW/P>XBS-OS	2875
	Champagne Gold	UC24SW/P>XCG-OS	2875
	Crystal Glass	UC24SW/P>XGL-OS	7570
	Pearl White	UC24SW/P>XPW-OS	2875
Double Pole Switch			
1 Gang 250V 20A Double Pole Switch module with Blue LED	Module	U201SPM/DP>B00-OS	5635
Cover Plate for 1 Gang DP Switch	Brushed Silver	UC21DP/P>XBS-OS	1755
	Champagne Gold	UC21DP/P>XCG-OS	1755
	Crystal Glass	UC21DP/P>XGL-OS	5285
	Pearl White	UC21DP/P>XPW-OS	1755
Bell Push			
Bell Push Switch Module with Blue LED	Module	US31BPB00	2155
Cover Plate for Bell Press Switch	Brushed Silver	UC31BPXBS	1720
	Champagne Gold	UC31BPXCG	1720
	Crystal Glass	UC31BPXGL	5635
	Pearl White	UC31BPXPW	1720
Sockets			
6-16A Switched Socket	Module	US15/616000	5005
Cover Plate for 6-16A Switched Socket	Brushed Silver	UC15/616XBS	2695
	Champagne Gold	UC15/616XCG	2695
	Crystal Glass	UC15/616XGL	7040
	Pearl White	UC15/616XPW	2695
6A 2/3 Pin Switched Socket	Module	US15/6U000	4235
Cover Plate for 6A 2/3 Pin Switched Socket	Brushed Silver	UC15/6UXBS	2305
	Champagne Gold	UC15/6UXCG	2305
	Crystal Glass	UC15/6UXGL	5980
	Pearl White	UC15/6UXPW	2305
International Socket	Module	US426/16IS000	2560
Cover Plate for International Socket	Brushed Silver	UC426/16ISXBS	1800
	Champagne Gold	UC426/16ISXCG	1800
	Crystal Glass	UC426/16ISXGL	5105
	Pearl White	UC426/16ISXPW	1800

W.E.F. June 01, 2017

ULTI Impress - The Ultimate Switch



Data Socket with Brushed Silver Cover Plate



Twin Data Socket with Crystal Glass Cover Plate



Keycard switch with Brushed Silver Cover Plate



Shaver Socket with Champagne Gold Cover Plate

Description	Colour	Reference	Unit MRP [₹]
Accessories			
TV Socket Module	Module	US31TV000	2155
	Brushed Silver	UC31TVXBS	2065
Cover Plate for TV Socket	Champagne Gold	UC31TVXCG	2065
	Crystal Glass	UC31TVXGL	6860
	Pearl White	UC31TVXPW	2065
	Module	UD31RJ000	2695
Data Socket Module	Brushed Silver	UDC31RJXBS	2065
	Champagne Gold	UDC31RJXCG	2065
	Crystal Glass	UDC31RJXGL	6855
Cover Plate for Data Socket	Pearl White	UDC31RJXPW	2065
	Module	UD32TD000	4125
	Brushed Silver	UDC32DXBS	2065
Twin Data Socket Module	Champagne Gold	UDC32DXCG	2065
	Crystal Glass	UDC32DXGL	6950
	Pearl White	UDC32DXPW	2065
	Blank Module	Module	US31X000
Cover Plate for Blank Module	Brushed Silver	UC31XXBS	2250
	Champagne Gold	UC31XXCG	2250
	Crystal Glass	UC31XXGL	4585
	Pearl White	UC31XXPW	2250
	USB Chargers NEW		
1 Gang 2.1A USB Charger Module	White	US31USB_WE	3320
	Grey	US31USB_GY	3320
	Brushed Silver	UC31USB_XBS	2215
Cover Plate for 1 Gang 2.1A USB Charger	Champagne Gold	UC31USB_XCG	2215
	Crystal Glass	UC31USB_XGL	6620
	Pearl White	UC31USB_XPW	2215
	Hotel Series		
Keycard Switch with Cover Plate	Brushed Silver	U31EKTHBBS	9855
	Champagne Gold	U31EKTHACG	9855
	Crystal Glass	U31EKTHBGL	12985
	Pearl White	U31EKTHBPW	9855
Shaver Socket with Cover Plate	Brushed Silver	US727HXBS	8245
	Champagne Gold	US727HXCG	8245
	Crystal Glass	US727HXGL	12130
	Pearl White	US727HXPW	8245

Kavacha - Weather Protected Series



- Pleasing looks with **IP56 protection**
- Large press switch
- Co-moulded sealing with no risk of gasket damage
- Chemical resistant & UV stabilised



WHT20-GY-EX



CSW110-GY-EX



A3031WBP_WE

Description	Reference	Unit MRP [₹]
Kavacha IP56 Surface Mount Switches		
Switches with Looping Terminal		
10A 1 Gang 2 Way Switch	CSW110-GY-EX	1755
20A/16A 1 Gang 2 Way Switch	CSW120-GY-EX	2015
10 A 2 Gang 2 Way Switch	CSW110/2-GY-EX	2390
20A/16A 1 Gang 2 Way Switch	CSW120/2-GY-EX	2680
10A 1 Gang 2 Way Bell Press Return Switch	CSW110BPR-GY-EX	2035
Switches with Looping Terminal with Neon		
10 A 1 Gang 2 Way surface switch with Looping Terminal with Neon	CSW110N-GY-EX	2015
10A 2 Gang 2 Way with Looping Terminal and Neon	CSW110/2N-GY-EX	2540
20A 1 Gang 2 Way with Looping Terminal with Neon	CSW120N-GY-EX	2165
20A/16A 2 Gang 2 Way with Looping Terminal with Neon	CSW120/2N-GY-EX	2835
Double Pole Switches		
20A 1 Gang Double Pole Switch	CSW220-GY-EX	2760
20A 2 Gang Double Pole Switch	CSW220/2-GY-EX	2905
Kavacha Heavy Duty Isolator Switches		
20A Double Pole	WHB220-RG	3045
20A Triple Pole	WHT20-GY-EX	3390
35A Triple Pole	WHT35-GY-EX	3785
55A Triple Pole	WHT55-GY-EX	4030
63A Triple Pole	WHT63-GY-EX	4315
Kavacha IP56 Surface Mount Combined Switched Socket Outlets		
Combination Switch Socket Outlets		
16A Single Pole Switched Socket Outlet	CSC316RP-GY-EX	2905
16A Single Pole Switched Socket Outlet with Neon	CSC316RPN-GY-EX	3130
Kavacha IP56 Surface Mount Socket Outlets		
16A Socket Outlet	CSO316RP-GY-EX	1720
Kavacha Full-Time Weatherproof Cover		
Full-Time Weatherproof Membrane Switch Cover (Transparent) IP55	E223M_TR	1024
Full-Time Weatherproof Membrane Switch Cover (White) IP56	E223M_WE	924
Full-Time Weatherproof Single Gang Socket Cover (Transparent) IP55	E223R_TR	720
Full-Time Weatherproof Single Gang Socket Cover (White) IP56	E223R_WE	652
Kavacha Weatherproof Door Bell Switch		
Surface Mounted Door Bell with LED Indicator (Grey) IP44	A3031WBP_GY	1074
Surface Mounted Door Bell with LED Indicator (White) IP44	A3031WBP_WE	940

Metal Boxes



- **Weld free design** to minimize corrosion and rusting without compromising on strength
- Mounting clip and earth pin designed for **easier installation** and to **avoid loss during transportation**
- Removable side plates and optimized knock outs and for **easier wiring**
- Completely tested & validated as per **IS 14772**

Description	Reference	Unit MRP [₹]
Metal Boxes for Indian Format Ranges (Livia, Opale & ZENcelo India) NEW		
0.8 mm thickness		
Metal Box 1 & 2 modules	ME0102	84
Metal Box 3 modules	ME0103	108
Metal Box 4 modules	ME0104	124
1 mm thickness		
Metal Box 1 & 2 modules	MR1102	94
Metal Box 3 modules	MR1103	122
Metal Box 4 modules	MR1104	142
Metal Box 6 modules	MR1106	194
Metal Box 8 modules - Horizontal	MR1108	256
Metal Box 8 modules - Square	MR1109	256
Metal Box 12 module	MR1112	314
Metal Box 18 modules	MR1118	374

Description	Reference	Unit MRP [₹]
Metal Boxes for BS Format Ranges (ZENcelo BS, NEO, ULTI)		
1mm thickness		
2 GANG GI Metal Boxes	GM1102	218
3 GANG GI Metal Boxes	GM1103	318
4 GANG GI Metal Boxes	GM1104	418

- Special Metal Box with Gang Partition to accommodate BS format ranges
- Single Metal Box can accommodate up to 4 units
- Number of Gangs for Metal Box = Number of units that it can accommodate (Eg. 3 GANG Metal Box can accommodate up to 3 BS format Units)

EzInstall 3 - ULTI ZIGBEE



Glass Plates



Brushed Silver



Champaign Gold



Milky White

- 2 wire design, True Retrofit
- Intelligent dimmer with Auto Load Detection feature
- Capability to dim or switch on/off different load types (in case of non dimmable loads connected to dimmer)
- Very high network scalability with Peer to Peer Mesh technology
- Each unit (switch, dimmer) is a repeater – no need for any additional repeater
- Moods created at a touch of a button
- ZigBee protocol is based on the IEEE802.15.4 standard and works on 2.4GHz radio frequency

Description	Catalogue No.	Unit MRP [₹]
1 Gang 2000VA Zigbee Switch	U201SRY2KWZB	17127
1 Gang Switch Coverplate - Brushed Silver	UC21SWXBS	1332
1 Gang Switch Coverplate - Pearl White	UC21SWXPW	1332
1 Gang Switch Coverplate - Champagne Gold	UC21SWXCG	1332
1 Gang Switch Coverplate - Crystal Glass	UC21SWXGL	6174
2 Gang 2X1000VA Zigbee Switch	U202SRY2KWZB	19746
2 Gang Switch Coverplate - Brushed Silver	UC22SWXBS	1854
2 Gang Switch Coverplate - Pearl White	UC22SWXPW	1854
2 Gang Switch Coverplate - Champagne Gold	UC22SWXCG	1854
2 Gang Switch Coverplate - Crystal Glass	UC22SWXGL	6516
1 Gang 550W Zigbee Dimming Switch	U201DST600ZB	17685
1 Gang Dimmer Coverplate - Brushed Silver	UC21DMXBS	2133
1 Gang Dimmer Coverplate - Pearl White	UC21DMXPW	2133
1 Gang Dimmer Coverplate - Champagne Gold	UC21DMXCG	2133
1 Gang Dimmer Coverplate - Crystal Glass	UC21DMXGL	6444
2 Gang 2X300W Zigbee Dimming Switch	U202DST600ZB	21240
2 Gang Dimmer Coverplate - Brushed Silver	UC22DMXBS	2133
2 Gang Dimmer Coverplate - Pearl White	UC22DMXPW	2133
2 Gang Dimmer Coverplate - Champagne Gold	UC22DMXCG	2133
2 Gang Dimmer Coverplate - Crystal Glass	UC22DMXGL	8091
1 Gang 300VA Zigbee Curtain Control Switch	U201SCN300ZB	21420
1 Gang Curtain Coverplate - Brushed Silver	UC21CNXBS	1917
1 Gang Curtain Coverplate - Pearl White	UC21CNXPW	1917
1 Gang Curtain Coverplate - Champagne Gold	UC21CNXCG	1917

Description	Catalogue No.	Unit MRP [₹]
1 Gang Curtain Coverplate - Crystal Glass	UC21CNXGL	5760
2 Gang 2X300VA Zigbee Curtain Control Switch	U202SCN600ZB	24543
2 Gang Curtain Coverplate - Brushed Silver	UC22CNXBS	2133
2 Gang Curtain Coverplate - Pearl White	UC22CNXPW	2133
2 Gang Curtain Coverplate - Champagne Gold	UC22CNXCG	2133
2 Gang Curtain Coverplate - Crystal Glass	UC22CNXGL	8091
500W ZigBee IND PlugAdaptor Dimmer Wh	U104ND500ZB_WE	16290
Zigbee Handheld Remote Controller	U105RHH001ZB	10989
2Key Zigbee Freelocate Switch, Brushed Silver	U102RWMZB_XBS	9090
2Key Zigbee Freelocate Switch, Champagne Gold	U102RWMZB_XCG	9090
2Key Zigbee Freelocate Switch, Crystal Glass	U102RWMZB_XGL	12960
2Key Zigbee Freelocate Switch, Pearl White	U102RWMZB_XPW	9090
6Key Zigbee Freelocate Switch, Brushed Silver	U106RWMZB_XBS	10197
6Key Zigbee Freelocate Switch, Champagne Gold	U106RWMZB_XCG	10197
6Key Zigbee Freelocate Switch, Crystal Glass	U106RWMZB_XGL	14706
6Key Zigbee Freelocate Switch, Pearl White	U106RWMZB_XPW	10197
Zigbee to RS232 Interface	UB3Z5	11871
Zigbee IR Gateway	U30IRSDMZB	17730
Zigbee IP Gateway	U30IPGWZB	18162
Zigbee Analog Module	U30010V	9774



Once there were smart homes,
now there are Wiser Homes.



For Details and price information please contact our nearest Sales Office

Sympholux

LIGHTING CONTROL

Sympholux enables you to optimally balance light and energy because Schneider Electric remains the only Lighting Control expert who offers you harmonious orchestration via three platforms

KNX

C-Bus

DALI

No matter what your building type, location, budget or unique application and needs, no one is more perfectly placed to provide you with an optimized solution than Schneider Electric



The standard in interoperability



KNX Benefits

- Developed and supported by one organization of manufacturers and users
- Open protocol compatibility with a vast choice of products/applications
- Full 3rd party integration
- Total multi-functionality of products and media
- Single-system-specific configuration software
- Extensive worldwide training

C-Bus

The expert in ambience lighting



C-BUS Benefits

- Fully topology independent
- Industry standard CAT5e cable
- Highly reliable and robust, cost effective per-node control
- Simple commissioning and installation
- Easy-to-reconfigure distributed intelligent local programming
- High-power and architectural dimming
- Consistent switch and C-Bus product look and feel



Optimizing individual control and centralized management



DALI Benefits

- Single-system control of lighting and emergency lights from multiple manufacturers
- Delivers full dimming of ballasts, groups and lines
- Comprehensive monitoring and energy saving at each device level
- Simple wiring, configuration, maintenance and reconfiguration
- Ethernet backbone linking multiple DALI networks into a single system

Hotel Series

Control Systems

ULTI ELV



- ULTI style, state-of-art lighting control and electrical automation scheme for hotel guest room control, offering sophisticated design
- Light touch buttons equipped with LED backlight enable guest to locate switch in a dark environment
- Comparative with Universal Input/ Output module (Room Logic Gateway -RLG) or third party guestroom control system

Description	MOQ	Reference	Unit MRP [₹]
DND/PCU Control Switch	1	US32DMRJ000	On Request
Cover Plate for DND/PCU Switch	50	UC32HDMSXCG	On Request
Cover Plate for DND/PCU Switch	1	UC32HDMSXBS	On Request
Cover Plate for DND/PCU Switch	50	UC32HDMSXGL	On Request
Cover Plate for DND/PCU Switch	1	UC32HDMSXPW	On Request
DND/PCU Indicator w/Bell Press (Blue)	1	US33DMRJ000	On Request
DND/PCU Indicator w/Bell Press (Amber)	1	US33DMRJA00	On Request
Cover Plate for DND/PCU with bell push switch	1	UC33HBPDMXCG	On Request
Cover Plate for DND/PCU with bell push switch	1	UC33HBPDMXBS	On Request
Cover Plate for DND/PCU with bell push switch	1	UC33HBPDMXGL	On Request
Cover Plate for DND/PCU with bell push switch	50	UC33HBPDMXPW	On Request
Cardkey Switch (Low Voltage)	15	U31EKTHLVBWP	On Request
Cardkey Switch (Low Voltage)	15	U31EKTHLVACG	On Request
Cardkey Switch (Low Voltage)	15	U31EKTHLVBGL	On Request
Cardkey Switch (Low Voltage)	15	U31EKTHLVBBS	On Request
1 Gang ELV Switch (Amber)	30	U201SPM_RJ_A00	On Request
1 Gang ELV Switch (Blue)	1	U201SPM_RJ_B00	On Request
Coverplate for 1 Gang ELV switch	1	UC21SWXCG	On Request
Coverplate for 1 Gang ELV switch	1	UC21SWXBS	On Request

Description	MOQ	Reference	Unit MRP [₹]
Coverplate for 1 Gang ELV switch	1	UC21SWXGL	On Request
Coverplate for 1 Gang ELV switch	1	UC21SWXPW	On Request
2 Gang ELV Switch- AMBER	30	U202SPM_RJ_A00	On Request
2 Gang ELV Switch- BLUE	1	U202SPM_RJ_B00	On Request
Coverplate for 2 Gang ELV switch	1	UC22SWXCG	On Request
Coverplate for 2 Gang ELV switch	1	UC22SWXBS	On Request
Coverplate for 2 Gang ELV switch	1	UC22SWXGL	On Request
Coverplate for 2 Gang ELV switch	1	UC22SWXPW	On Request
4 Gang ELV Switch- AMBER	30	U204SPM_RJ_A00	On Request
4 Gang ELV Switch- BLUE	1	U204SPM_RJ_B00	On Request
Coverplate for 4 Gang ELV switch	50	UC24SW_XCG	On Request
Coverplate for 4 Gang ELV switch	50	UC24SW_XBS	On Request
Coverplate for 4 Gang ELV switch	50	UC24SW_XGL	On Request
Coverplate for 4 Gang ELV switch	50	UC24SW_XPW	On Request

Colours Available (suffix as in coverplates above)

BS	Brushed Silver
PW	Pearl White
CG	Champagne Gold
GL	Crustal Glass

Neo ELV



Description	MOQ	Reference	Unit MRP [₹]
1 gang ELV switch with Amber LED	1	E3031LV>EAGS-OS	On Request
2 gang ELV switch with Amber LED	1	E3032LV>EAGS-OS	On Request
3 gang ELV switch with Amber LED	1	E3033LVEAGS	On Request
1 Gang Curtain Switch without LED	1	E3031CLV>GS-OS	On Request
2 Gang Curtain Switch without LED	1	E3032CLV>EAGS-OS	On Request
1 gang Dimmer Module with Amber LED	1	E3031DLV_EAGS	On Request
2 gang Dimmer Module with Amber LED	1	E3032DLV_EAGS	On Request
Bell Push with DND and MMR Indicator	1	E3031DMBLVEGGS	On Request
Bell Push with DND, MMR and Butler Indicator	60	E3031DMBWLVEGGS	On Request
DND/MMR Control switch	1	E3032DMLV>EAGS-OS	On Request
DND, MMR and Butler Control switch	1	E3033DMBLVEAGS	On Request
Key card switch with Amber LED	60	E3031EKTHLVEAGS	On Request

Hotel Series

Control Systems

Zencelo ELV



Description	MOQ	Reference	Unit MRP [₹]
1 Gang Sw W/ LED Indicator	1	E8431LV	On Request
1 Gang Sw W/ LED Indicator, SZ	1	E8431LVSZ	On Request
2 Gang Sw W/ LED Indicator	1	E8432LV	On Request
2 Gang Sw W/ LED Indicator, SZ	1	E8432LV_SZ	On Request
3 Gang Sw W/ LED Indicator	1	E8433LV	On Request
3 Gang Sw W/ LED Indicator, SZ	1	E8433LVSZ	On Request
2 Gang Curtain Sw Open/Close	1	E8432CLV	On Request
2 Gang Curtain Sw Open/Close, SZ	1	E8432CLV_SZ	On Request
Elv Keycard Switch	50	E8431EKTLV	On Request
Elv Keycard Switch, SZ	50	E8431EKTLV_SZ	On Request
1 Gang Sw W/ DND	1	E8431DSL	On Request
1 Gang Sw W/ DND, SZ	1	E8431DSL_SZ	On Request
2 Gang Sw W/ DND & PCU	1	E8432DMSLV	On Request
2 Gang Sw W/ DND & PCU, SZ	1	E8432DMSLV_SZ	On Request
Bell Press W/ DND & PCU Indicator	1	E8431BDMLV	On Request
Bell Press W/ DND & PCU Indicator,SZ	1	E8431BDMLV_SZ	On Request
3 Gang Curtain Sw Open/Half/Close	1	E8433CLV	On Request
3 Gang Curtain Sw Open/Half/Close	1	E8433CLV_SZ	On Request

Colours Available (suffix as above)

SZ Silver Bronze

No suffix after LV White Colour

RLG (UIO), Bedside Panel and Accesories

Description	MOQ	Reference	Unit MRP [₹]
Room Logic Gateway.	1	UB3	On Request
RS485 COMM Board (MCU Card)	1	U20NRUD300000	On Request
UIO Relay Board	1	UAX008	On Request
Firmware download cable	1	UAX-015	On Request
Power Supply For RLG	1	E5400P12/1500BS	On Request
UIO- CBUS Sim Card	1	5000SM/2-HUIO	On Request

Note:

- All Hotel Series items are non stockable and lead time is around 10-14 weeks.
- Customised bedside panels will have a MOQ. Pls speak with the product manager in your region for details.
- For Bedside panel, pl take additional items like MCU card and power supply.
- For room logic gateway, power supply is required sepately.

Argus

Control Systems

Occupancy Sensors



Description	Reference	Unit MRP [₹]
Argus 300 Electronic outdoor movement detector, max. range 16 m with IP55 protection	MTN564319	11790
Argus 360 Electronic movement detector for outdoor ceiling mounting max. range 16 m, IP55 protection	MTN564419	13032
Argus 110 Electronic outdoor movement detector, angle of detection 110 degrees, max. range 12 mtrs, IP55 protection	MTN565119	5706
Argus 220 Electronic movement detector for outdoor ceiling mounting angle of detection 220 degrees, max. range 12 mtrs, IP55 protection	MTN565219	8559
ARGUS Presence Master with IR, DALI	MTN5510-1519	14850
Accessories		
Mounting bracket for Argus 110 and Argus 220 Sensors	MTN565291	720
Extension for Argus 300 Sensor	MTN554399	1202

Ceiling and Wall Mount Sensors

PIR and Ultrasonic Sensors /Surface Mount Sensors



Description	Reference	Unit MRP [₹]
Surface Mount Single-Load 360 degrees PIR	CSS54E_WE	2759
Flush/Surface Mount Single-Load 360 degrees PIR	SAE-UE-MS-CSAWE	3375
Flush Mount Dual load 360 degrees standalone sensor	SAE-UE-MS-CDBWE	6543
Flush/Surface Mount Single - Load 360 degrees, PIR and Ultrasonic Motion sensor	SAE-UE-MS-CU-WE	14832
Flush/Surface Mount Dual Load 360° PIR, 0-10V Analog Dimmable Sensor with remote	SAE-UE-MS-CDDWE	7920
Remote for PIR and Ultrasonic Motion sensor	SAE-UE-MS-IR10T	1643
Remote for standalone PIR sensor	SAE-UE-MS-1R-WE	2070

Wall Mount Sensors



Description	Reference	Unit MRP [₹]
Neo C-Metro 200 degrees wall mount sensor, grey colour	E3751MS3C_GS	3798
Neo C-Metro 90 degrees wall mount sensor, grey colour	E3751MS3A_GS	3798
Zencelo 110 degrees wall mount sensor, white colour	E84751MS3B_WE	3510
Zencelo 90 degrees wall mount sensor, white colour	E84751MS3A_WE	3510

Control and Command Control Systems Products

Time Switches



- 7D, 24H Programmable switch .Voltage Rating: 230V AC +10%, -15%
- Consumption: 1 channel - max. 4VA; 2 channels - max. 7VA
- Memory: Upto 56 Switching Operations
- Back up of program & time by lithium battery: Operating reserve: 6 Years
- Overall dimensions: 5 modules
- Cable length: 100m
- Minimum time between two switching operations: 1 min

Description	Module Width 18mm/module	Reference	Unit MRP [₹]
IHP - intuitive switch - 1 channel - 7D 24 H	2.5	CCT15720	8550
IHP Plus - intuitive switch - 1 channel - 7D 24 H, pulse programming	2.5	CCT15721	9882
IHP - intuitive switch - 2 channels - 7D 24 H	2.5	CCT15722	10332
IHP+ - intuitive switch - 2 channels - 7D 24 H, pulse programming	2.5	CCT15723	11997

Timers



- Switching capacity 16 A, max
- Delay range from 30 sec to 20 min
- Capacity for lighted pushbutton 150 mA
- Electric distribution busbar compatibility
- Output power capacity CCT15232-2300W
- Output power capacity CCT15223-3600W

Description	Module Width 18mm/module	Reference	Unit MRP [₹]
MINs - electronic timer - 0.5 to 20 min	1	CCT15232	4464
MINs - electronic timer - 0.5 to 20 min with switch Off Warning	1	CCT15233	7223
MINs - electronic timer - 0.5 to 20 min with switch Off Warning and Impulse relay function	1	CCT15234	7272

Light sensitive switch



- Includes wall mounted cell
- Adjustable brightness threshold 2 to 2000 Lux
- 2 LEDs to signal the sensor status and the output status
- Test button: To check the product and load cabling
- Switching capacity: 16Amp
- Screwless Terminals compatible with rigid and flexible wires
- Consumption 6 VA
- Size 45mm

Description	Module Width 18mm/module	Reference	Unit MRP [₹]
IC 2000 - light sensitive switch - 2...2000 lux - with wall-mounted cell	2.5	CCT15368	10283
Wall-mounted cell for IC2000 light sensitive switch		CCT15268	3083
IC 200 - light sensitive switch - 2...200 lux - with wall-mounted cell	2.5	CCT15284	7223
Switchboard cell for IC200 light sensitive switch		15281	2493
IC Astro (Astronomical Time Switches)	2.5	CCT15223	15930

Analog Timers

Control Systems

Time Switches (Analog)



Description	Module Width 18mm/module	Reference	Unit MRP [₹]
IH 24H 16 A 15 mts interval 1 channel	1	15336	3726
IH 24H 16 A 30 mts interval 1 channel	1	CCT15365	4185
IH 24H + 7 day 10 A 1 channel- Max 16 On, 16 Off and 7 On + 7 Off cycles	3	15366	6255
IH 7 day 16 A 1 channel- Max 21 On and 21 Off cycles	3	CCT15367	6111
ITM4C6E - multifunctional switch - 4 channels (7 days + dated days)	5	15270	12852
IH 24H 16 A 30 mts 1 channel without reserve	3	CCT16364	3384

Xightor Pro Control Systems

Video Door Entry System



Description	Reference	Unit MRP [₹]
7" VDE Touch screen frame, Matt bronze	VDETC07_MB	On Request
7" VDE Touch screen frame, Matt silver	VDETC07_MS	On Request
7" VDE Touch screen frame, White	VDETC07_WE	On Request
Single phase regulated switch mode power supply - 24W/12V/2A	ABL8MEM12020	On Request
IP Outdoor door camera	VDEDC_SS	On Request
IP Outdoor lobby phone with LCD screen, stainless steel	VDELP1_AL	On Request
IP Outdoor lobby phone without LCD screen, stainless steel	VDELP2_SS	On Request
7" IP Video Door entry touch screen universal base module, including LCD touch screen-electronics, mounting parts	VDETS07D	On Request
Guardphone Software	VDE_AMS	On Request
Server and Management Software	VDE_SERVER	On Request

Datacomms

Structured Cabling Solutions



Description	Reference	Unit LP [₹]
Actassi Copper Cables		
Cat 6a 10G UTP Cable 305m Blue CM	ACTTG4P6AJUCM3RBU	On Request
Cat 6a 10G UTP Cable 305m White LSZH	ACTTG4P6AULS3RBU	On Request
Cat 6a 10G FTP Cable 305m BlueCM	ACTTG4P6ASCM3RBU	On Request
Cat 6a 10G FTP Cable 305m Blue LSZH	ACTTG4P6ASLS3RBU	On Request
Cat.6 4pr UTP Cable 305m Blue CM	ACT4P6UCM3RBBU_E	On Request
Cat.6 4pr UTP Cable 305m white LSZH	ACT4P6ULS3RBWE_E	On Request
Cat.6 4pr FTP Cable 305m Blue CM	ACT4P6SCM3RBBU	On Request
Cat.5e 4pr UTP Cable 305m Grey CM	ACT4P5EUCM3RBGY	On Request
Actassi Copper Connectivity		
CAT 6A UTP Keystone White Non Shutter	VDIB1775XUWE_E	340
FTP/UTP 24-port Patch Panel Unloaded	ACTPPS24NSU	2744
Cat.6A 10G FTP 24-port Patch Panel Loaded	ACTPP6ATGS24NSS	15109
Cat.6A 10G UTP 24-port Patch Panel Non-Shutter Loaded	ACTPP6ATGU24NSS_E	10646
Cat 6A UTP PP 24 Port 1UAngled UnLoaded	ACTPP6ATGUXNSA_E	2465
Cat 6A FTP Patchcord 1 mtr Grey	ACTPTG6ASBCM10GY_E	443
Cat 6A FTP Patchcord 1 mtr Blue	ACTPTG6ASBCM10BU_E	443
Cat 6AFTP Patchcord 1 mtr Red	ACTPTG6ASBCM10RD_E	443
Cat 6A FTP Patchcord 2 mtr Grey	ACTPTG6ASBCM20GY_E	531
Cat 6A FTP Patchcord 2 mtr Blue	ACTPTG6ASBCM20BU_E	531
Cat 6AFTP Patchcord 2 mtr Red	ACTPTG6ASBCM20RD_E	531
Cat 6A FTP Patchcord 3 mtr Grey	ACTPTG6ASBCM30GY_E	643
Cat 6A FTP Patchcord 3 mtr Blue	ACTPTG6ASBCM30BU_E	643
Cat 6AFTP Patchcord 3 mtr Red	ACTPTG6ASBCM30RD_E	642
SOCKET RJ45 CAT6 KSTONE BLUE UTP	VDIB17766UBU_E	216
SOCKET RJ45 CAT6 KSTONE RED UTP	VDIB17766URD_E	216
SOCKET RJ45 CAT6 KSTONE YELLOW UTP	VDIB17766UYL_E	216
SOCKET RJ45 CAT6 KSTONE GREEN UTP	VDIB17766UGR_E	216
SOCKET RJ45 CAT6 KSTONE WHITE UTP	VDIB17766UWE_E	216
Cat 6 24 AWG UTP stranded Patch cord 1 Meter - Grey	ACTPC6UBCM10GY_E	193
Cat 6 24 AWG UTP stranded Patch cord 1 Meter - Yellow	ACTPC6UBCM10YL_E	193
Cat 6 24 AWG UTP stranded Patch cord 1 Meter - Green	ACTPC6UBCM10GR_E	193
Cat 6 24 AWG UTP stranded Patch cord 1 Meter - Blue	ACTPC6UBCM10BU_E	193
Cat 6 24 AWG UTP stranded Patch cord 1 Meter - Red	ACTPC6UBCM10RD_E	193
Cat 6 24 AWG UTP stranded Patch cord 2 Meter - Grey	ACTPC6UBCM20GY_E	210
Cat 6 24 AWG UTP stranded Patch cord 2 Meter - Yellow	ACTPC6UBCM20YL_E	210
Cat 6 24 AWG UTP stranded Patch cord 2 Meter - Green	ACTPC6UBCM20GR_E	210
Cat 6 24 AWG UTP stranded Patch cord 2 Meter - Blue	ACTPC6UBCM20BU_E	210
Cat 6 24 AWG UTP stranded Patch cord 2 Meter - Red	ACTPC6UBCM20RD_E	210
Cat 6 24 AWG UTP stranded Patch cord 3 Meter - Grey	ACTPC6UBCM30GY_E	238
Cat 6 24 AWG UTP stranded Patch cord 3 Meter - Yellow	ACTPC6UBCM30YL_E	238
Cat 6 24 AWG UTP stranded Patch cord 3 Meter - Green	ACTPC6UBCM30GR_E	238
Cat 6 24 AWG UTP stranded Patch cord 3 Meter - Blue	ACTPC6UBCM30BU_E	238
Cat 6 24 AWG UTP stranded Patch cord 3 Meter - Red	ACTPC6UBCM30RD_E	238
Cat 6 24 AWG UTP stranded Patch cord 1 Meter LSZH - Grey	ACTPC6UBLS10GY_E	201
Cat 6 24 AWG UTP stranded Patch cord 1 Meter- Yellow LSZH	ACTPC6UBLS10YL_E	201
Cat 6 ,24 AWG UTP stranded Patch cord 1 Meter-Green LSZH	ACTPC6UBLS10GR_E	201
Cat 6 24 AWG UTP stranded Patch cord 1 Meter Blue	ACTPC6UBLS10BU_E	201
Cat 6 24 AWG UTP stranded Patch cord 1 Meter Red	ACTPC6UBLS10RD_E	201
Cat 6 24 AWG UTP stranded Patch cord 2 Meter LSZH Grey	ACTPC6UBLS20GY_E	219

Description	Reference	Unit LP ₹
Actassi Copper Connectivity		
Cat 6 24 AWG UTP stranded Patch cord 2 Meter Yellow	ACTPC6UBLS20YL_E	219
Cat 6 24 AWG UTP stranded Patch cord 2 Meter Green	ACTPC6UBLS20GR_E	219
Cat 6 24 AWG UTP stranded Patch cord 2 Meter Blue	ACTPC6UBLS20BU_E	219
Cat 6 24 AWG UTP stranded Patch cord 2 Meter Red	ACTPC6UBLS20RD_E	219
Cat 6 24 AWG UTP stranded Patch cord 3 Meter LSZH Grey	ACTPC6UBLS30GY_E	247
Cat 6 24 AWG UTP stranded Patch cord 3 Meter Yellow	ACTPC6UBLS30YL_E	247
Cat 6A 24 AWG UTP stranded Patch cord 3 Meter Green	ACTPC6UBLS30GR_E	247
Cat 6 24 AWG UTP stranded Patch cord 3 Meter Blue	ACTPC6UBLS30BU_E	247
Cat 6 24 AWG UTP stranded Patch cord 3 Meter Red	ACTPC6UBLS30RD_E	247
Cat.5e UTP Keyst Non-Shutter Modular Jack White	ACTRJSM5ENSUWE	150
Cat5e UTP 24-port Non-Shutter Patch Panel Loaded	ACTPP5EU24NSS	4108
Cat.5e Patch Cord UTP 1M CM Grey	ACTPC5EUBCM10GY	200
Cat.5e Patch Cord UTP 2M CM Grey	ACTPC5EUBCM20GY	263
Cat.5e Patch Cord UTP 2M CM Red	ACTPC5EUBCM20RD	263

